

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

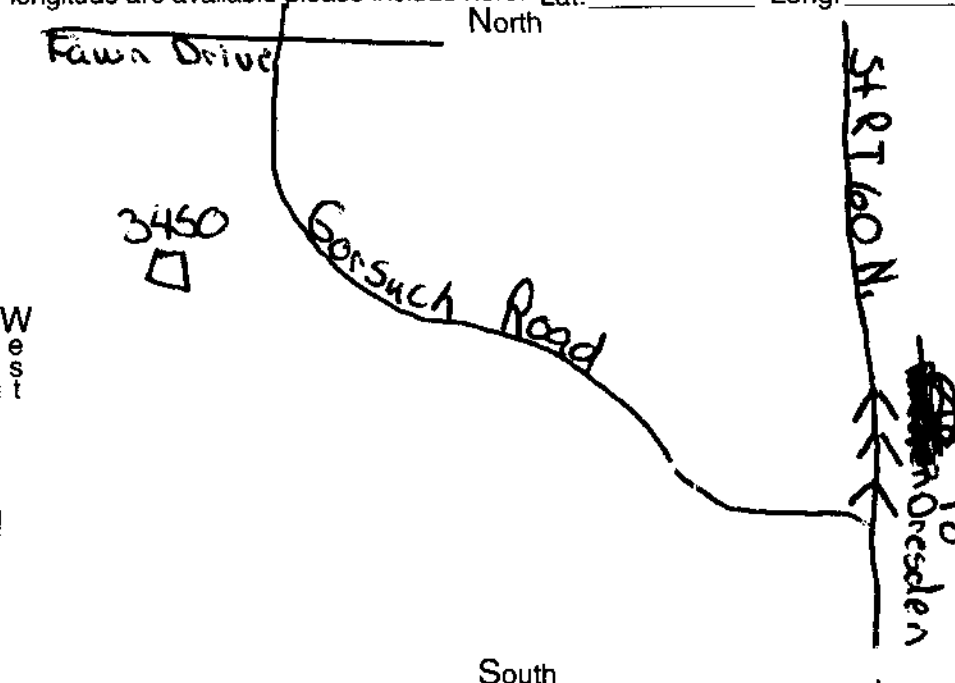
WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

958113

WELL LOCATION

CONSTRUCTION DETAILS

County Muskingum Township MuskingumOwner/Builder Mike Bednarz
(Circle One or Both) First LastAddress of Well Location 3450 Gossuch Road
Number Street NameCity Nashport Zip Code +4 43830Permit No. 348340 Section No. 18
(Circle One or Both)Location of Well in State Plane
coordinates, if available:Use of Well DomesticN ☐ X 390 56 +/- 509 ft.
S ☐ Y 082 07 +/- 878 ft.Elevation of Well 832' +/- 0 ft.Datum Plain: ☐ NAD27 ☒ NAD83 Elevation SourceSource of Coordinates: ☒ GPS ☐ Survey ☐ OtherSketch a map showing distance well lies from numbered state highways, street
intersections, county roads, buildings or other notable landmarks. If latitude and
longitude are available please include here: Lat: Long:

WELL TEST*

Pre-Pumping Static Level 62 ft. Date 4-9-04Measured from: ☐ Top of Casing ☐ Ground Level ☐ Other☐ Air ☒ Bailing ☐ Pumping* ☐ OtherTest Rate 3 gpm Duration of Test 2 hrs.Feet of Drawdown 85 ft. Sustainable Yield 3 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☒ Yes ☐ NoQuality Clear

PUMP/PITLESS

Type of pump Sub. Capacity 12 gpmPump set at 140 ft. Pitless Type Pull ThruPump installed by Bohn Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Bohn DrillingAddress 2760 Briggs RdCity, State, Zip Zanesville, OH 43701Signed Darwin Bohn Date 5-22-04ODH Registration Number 518☒ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☒ Borehole Diameter 7" inches Depth 29 ft.Casing Diameter 7" in. Length 32 ft. Thickness .188 in.2 ☒ Borehole Diameter 6 3/8" inches Depth 150 ft.Casing Diameter 4 1/2" in. Length 140 ft. Thickness .248 in.Casing Height Above Ground 1 1/2 ft.Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other2 ☐ Steel 2 ☐ Galv. 2 ☒ PVC 2 ☐ OtherJoints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☒ Other Alum. Rivets

SCREEN

Diameter 4 1/2" Slot Size 1/8" Screen Length 140 ft.Type Drilled Holes Material PVCSet Between 150 ft. and 10 ft.

GRAVEL PACK (Filter Pack)

Material/Size — Volume/Weight Used —Method of Installation —Depth: Placed FROM — ft. TO — ft.

GROUT

Material Benseal Volume/Weight Used 7Method of Installation Dry DrivenDepth: Placed FROM — ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown Loam	0	3
Sand	3	15
Gray Clay/Sand	15	27
Hard Gray Shale	27	30
Gray Sandstone	30	54
Sandy Shale	54	58
Gray Shale	58	68
Gray Sandstone	68	74
Gray Shale	74	125
Gray Sandstone	125	128
Gray Shale	128	130
Gray Sand Shale	130	143
Gray Sandstone	143	150

Water @ 8891203gpm31' of 7" with drive shoe

*(If more space is needed to complete drilling log, use next consecutively number)

Date of Well Completion 4-10-04 Total Depth of —Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drill.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 432.
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy