

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

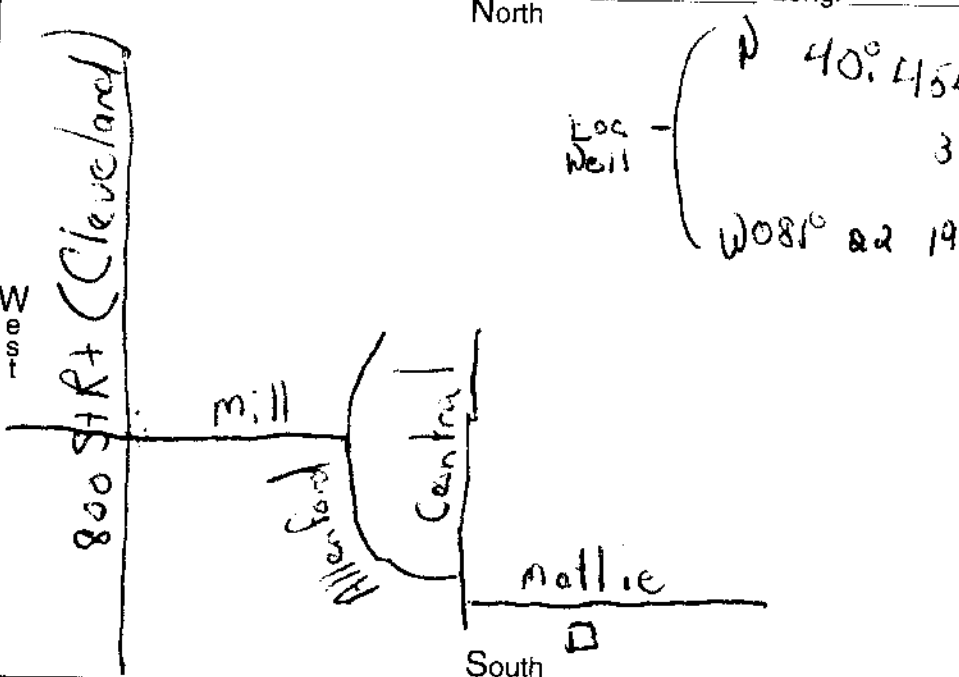
Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

961772

WELL LOCATION

County Stark Township CantonOwner/Builder Wm Gifford
(Circle One or Both) First LastAddress of Well Location 920 Mattie
Number Street NameCity Canton Zip Code +4 4707Permit No. Section/Lot No.
(Circle One or Both)Location of Well in State Plane coordinates, if available: Use of Well domesticN ☒ X ☐ +/- ft. or mS ☐ Y ☐ +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation SourceSource of Coordinates: ☒ GPS ☐ Survey ☐ OtherSketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40° 45' 39" Long: W 081° 22' 19"

WELL TEST*

Pre-Pumping Static Level 30 ft. Date 10-1-08Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other☒ Air ☐ Bailing ☐ Pumping* ☐ OtherTest Rate 18 gpm Duration of Test 3 hrs.Feet of Drawdown ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ NoQuality Clear

PUMP/PITLESS

Type of pump Submersible Capacity 10 gpmPump set at 75 ft. Pitless Type Baker 5 AO modelPump installed by Hall Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Hall DrillingAddress 2317 Leo Ave SWCity, State, Zip Canton OH 44706Signed [Signature]Date 10-8-08ODH Registration Number 3297

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 7 7/8" inches Depth 88 ft.Casing Diameter 5 in. Length 90 ft. Thickness 5BR-21 in.2 ☐ Borehole Diameter inches Depth ft.Casing Diameter in. Length ft. Thickness in.Casing Height Above Ground 18" / 1.5' ft.Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ OtherJoints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter N/A Slot Size A Screen Length ft.Type N/A Material Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size N/A Volume/Weight Used Method of Installation N/ADepth: Placed FROM ft. TO ft.

GROUT

Material Bentonite Volume/Weight Used 400 lbMethod of Installation tremieDepth: Placed FROM 0 ft. TO 88 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Sand / Brown	0'	15'
Sand + Gravel / Grey	15'	30'
Clay + Gravel / - Grey	30'	75'
Sand rock - / Brown	75'	89'
Sand rock - Light Brown	89'	115'

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy