

## WELL LOG AND DRILLING REPORT

TYPE OR USE PEN  
SELF TRANSCRIBING  
PRESS HARD

Ohio Department of Natural Resources  
Division of Water, 1939 Fountain Square Drive  
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

963409

## WELL LOCATION

County Henry Township Harrison

Owner/Builder Kyle Shepard  
(Circle One or Both) First Last

Address of Well Location 12-509 Rd 0  
Number Street Name

City Napoleon Zip Code +4 43545

Permit No. 20080030 Section/Lot No.   
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Residential

N ☐ X 4122.192 +/- ft. or m

S ☐ Y 08408.484 +/- ft. or m

Elevation of Well 645 +/- ft. or m


Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source GPS

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: \_\_\_\_\_ Long: \_\_\_\_\_

Rd 0

North

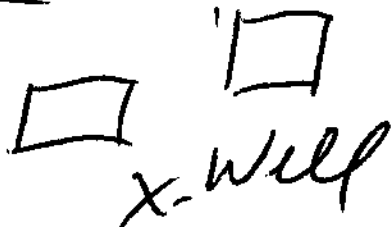

South

## WELL TEST\*

Pre-Pumping Static Level 6 ft. Date 10/10/08

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☐ Bailing ☒ Pumping\* ☐ Other

Test Rate 10 gpm Duration of Test 10 hrs.

Feet of Drawdown \_\_\_\_\_ ft. Sustainable Yield \_\_\_\_\_ gpm

\*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality good

## PUMP/PITLESS

Type of pump submersible Capacity 10 gpm

Pump set at 23 ft. Pitless Type slide

Pump installed by 1437 MP

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Bohly Construction

Address 217 N. Franklin

City, State, Zip Napoleon, Ohio

Signed Mike Rotz Date 10/10/08

ODH Registration Number 1437

## CONSTRUCTION DETAILS

☐ Rotary ☐ Cable ☒ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 36 inches Depth 26 ft.

Casing Diameter 576 in. Length 5 ft. Thickness 1/4 in.

2 ☐ Borehole Diameter 36 inches Depth 26 ft.

Casing Diameter 24 in. Length 20 ft. Thickness 2 in.

Casing Height Above Ground 12 ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☒ Other Concrete

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☒ Other Con seal

## SCREEN

Diameter \_\_\_\_\_ Slot Size \_\_\_\_\_ Screen Length \_\_\_\_\_ ft.

Type \_\_\_\_\_ Material \_\_\_\_\_

Set Between \_\_\_\_\_ ft. and \_\_\_\_\_ ft.

## GRAVEL PACK (Filter Pack)

Material/Size 1/2" gravel Volume/Weight Used 2 ton

Method of Installation direct applied

Depth: Placed FROM 10 ft. TO 25 ft.

## GROUT

Material  Bentonite  Volume/Weight Used 5 bag

Method of Installation drill up

Depth: Placed FROM 4 ft. TO 10 ft.

## DRILLING LOG\*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:  
sandstone, shale, limestone, gravel, clay, sand, etc.

From

To

|            |    |     |
|------------|----|-----|
| black sand | 0  | 2'  |
| brown sand | 2  | 5'  |
| gray sand  | 5  | 10' |
| light clay | 10 | 11' |
| blue clay  | 11 | 25' |

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.  
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971  
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy