

WELL LOCATION

CONSTRUCTION DETAILS

County Williams Township Bridgewater

Owner/Builder Jimmy Lawson
(Circle One or Both) First Last

Address of Well Location
Number Street Name

City Zip Code +4

Permit No. 3155 Section/Lot No. 28
(Circle One or Both)

Location of Well in State Plane coordinates, if available:

N ☒ X 41.6925 +/- 10 ft. or m


S ☐ Y 84.65755 +/- 10 ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☒ NAD83 Elevation Source

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 41.6925 Long: 84.65755
North

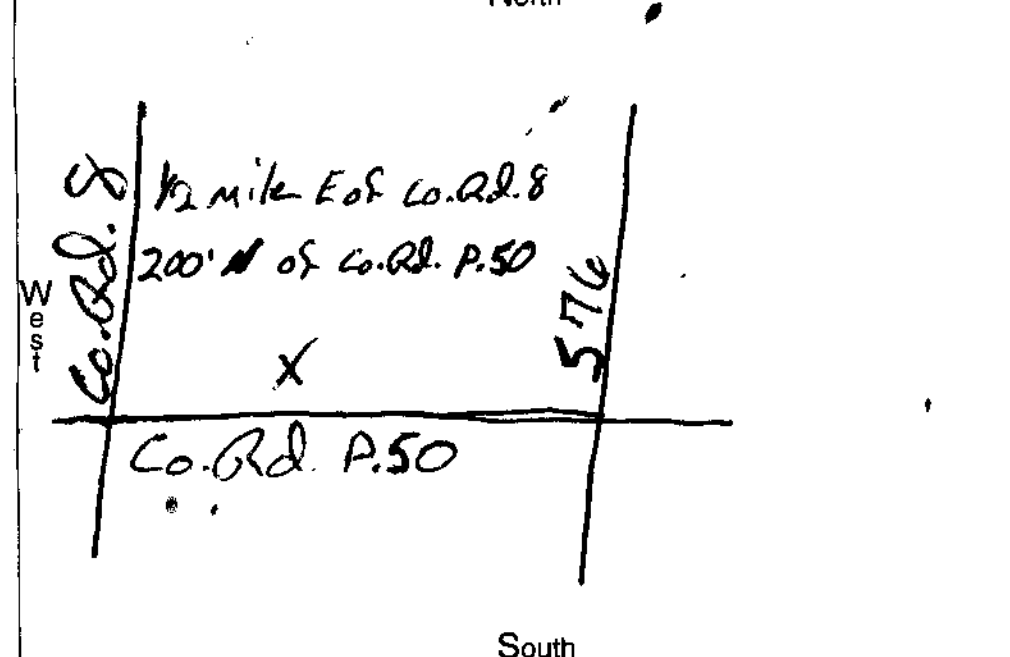

South

WELL TEST*

Pre-Pumping Static Level 17 ft. Date 6-12-07

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☒ Air ☐ Bailing ☐ Pumping* ☐ Other

Test Rate 60 gpm Duration of Test 1 hrs.

Feet of Drawdown 46 ft. Sustainable Yield 60 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Water is Clear NO Odor

PUMP/PITLESS

Type of pump Capacity gpm

Pump set at ft. Pitless Type

Pump installed by Wilcox

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Tuckers Sales & Service

Address 3557 Hudson Rd

City, State, Zip Osseo MI 49266

Signed J. J. Jan Date 6-19-07

ODH Registration Number 02160

☐ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 8.5 inches Depth 156 ft.

Casing Diameter 5 in. Length 52 ft. Thickness 5/8 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 4" Slot Size .025 Screen Length 4 ft.

Type Louvered Material Stainless Steel

Set Between 52 ft. and 56 ft.

GRAVEL PACK (Filter Pack)

Material/Size Standard 01 Volume/Weight Used 450 lbs. 9 bags

Method of Installation Gravity Fed

Depth: Placed FROM 52 ft. TO 56 ft.

GROUT

Material Bentonite Volume/Weight Used 200 lbs. 4 bags

Method of Installation Tremie Pipe

Depth: Placed FROM 0 ft. TO 51 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

From To

Brown Clay 0 13

Gray Clay 13 38

Gray Clay & Gravel 38 46

Medium to Coarse Gravel w/ls 46 56