

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT


Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

968583

WELL LOCATION

County Stark Township Plain
Owner/Builder Jim Oldfield
First Jim Last Oldfield
Address of Well Location 3222 Eastern St NE
Number 3222 Street Name Eastern St NE
City Canton Zip Code +4 44721
Permit No. 21732/136914 Section/Lot No.
(Circle One or Both)
Location of Well in State Plane coordinates, if available:
N ☐ X 40 52 718 +/- 8 ft or m
S ☐ Y 081 19 245 +/- 8 ft or m
Elevation of Well 1211 +/- 8 ft or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source
Source of Coordinates ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

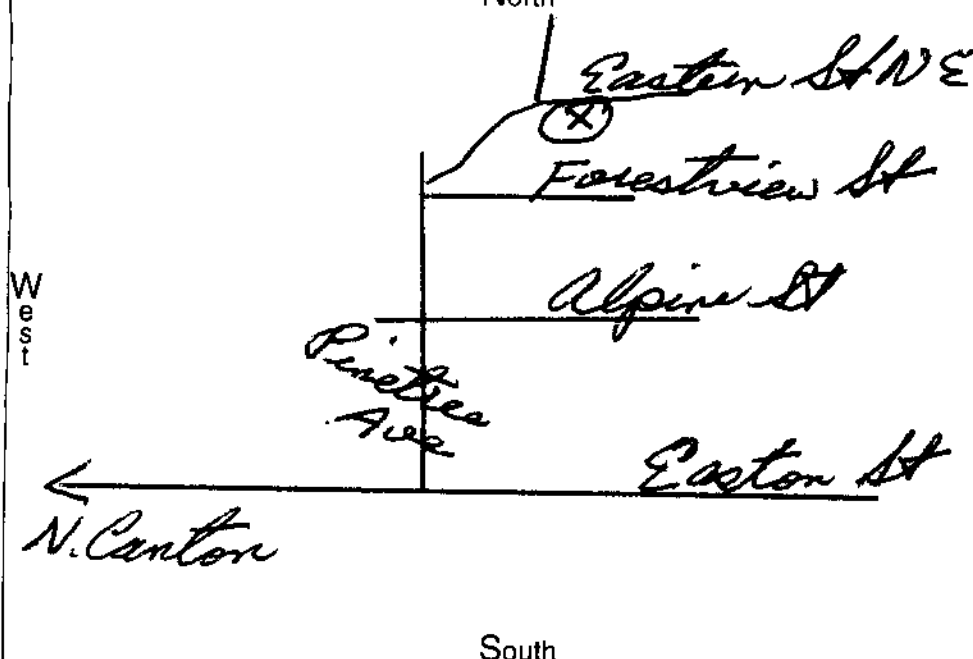

WELL TEST*

Pre-Pumping Static Level 45 ft. Date 4/6/05
Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other
☐ Air ☒ Bailing ☐ Pumping* ☐ Other
Test Rate 12 gpm Duration of Test 1/2 hrs.
Feet of Drawdown 10 ft. Sustainable Yield 12 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No
Quality Cloudy

PUMP/PITLESS

Type of pump Submersible Capacity 10 gpm
Pump set at 100 ft. Pitless Type Bulldog
Pump installed by Adams & Sons Pump
I hereby certify the information given is accurate and correct to the best of my knowledge.
Drilling Firm H. L. Smith Well Drilling Co
Address 9268 Kacheland Ave
City, State, Zip Marietta, OH 44647
Signed H. L. Smith Date 4/6/05
ODH Registration Number L 875

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☐ Borehole Diameter 5 inches Depth 140 ft.
Casing Diameter 5 in. Length 119 ft. Thickness 0.258 in.
2 ☐ Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground 1 1/2 ft.
Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other
Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.

GROUT

Material Bentonite Volume/Weight Used 150 lbs
Method of Installation Dry Driven
Depth: Placed FROM 0 ft. TO ? ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.		From To	
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.		From	To
Brown sand gravel, clay		0	97
Gray clay		97	108
Gray shale		108	115
Gray shale and sandstone		115	140

Water at 120-140

*(If more space is needed to complete drilling log, use next consecutively numbered form.)
Date of Well Completion 4/6/05 Total Depth of Well 140 ft.