

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

970457

WELL LOCATION

County Cashotow Township Millcreek

Owner/Builder Raymond E. Yoder
(Circle One or Both) First Last

Address of Well Location 30204 TR 213
Number Street Name

City FRESNO Zip Code +4 43824

Permit No. 2003-125 Section/Lot No.
(Circle One or Both)

Location of Well in State Plane coordinates, if available:

N ☐ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

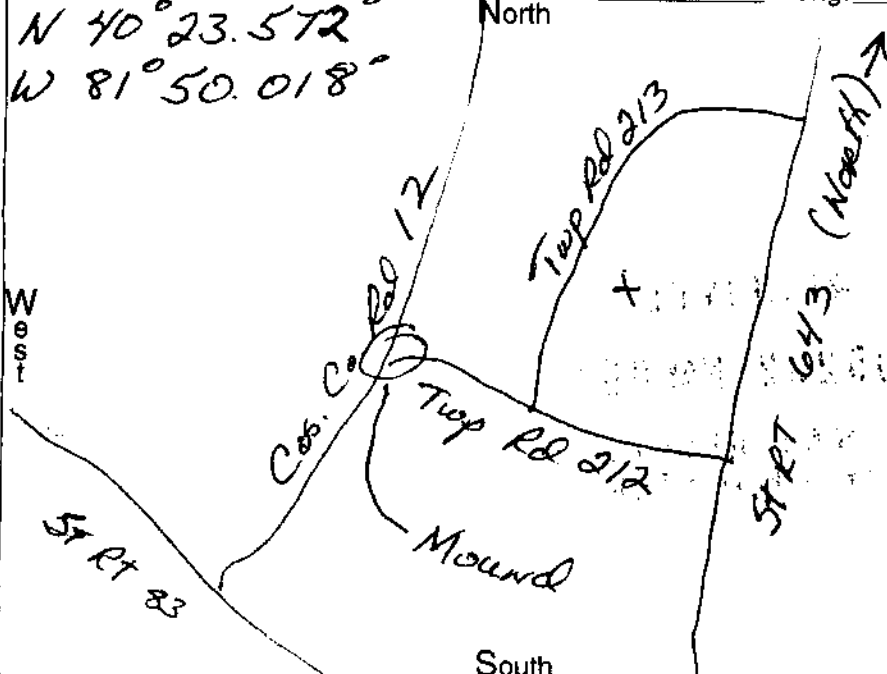

WELL TEST*

Pre-Pumping Static Level 45 ft. Date 5/7/04

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 1 1/2 gpm Duration of Test 2 hrs.

Feet of Drawdown Total ft. Sustainable Yield 1 1/2 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ No

Quality Clear

PUMP/PITLESS

Type of pump Quince Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm R.W. Krock and Co, Inc

Address 1621 Twp Rd 80

City, State, Zip Millersburg, Ohio 44654

Signed Karl W Krock Date 5/8/04

ODH Registration Number 2467

CONSTRUCTION DETAILS

☐ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 8 inches Depth 137 ft.

Casing Diameter 6 in. Length 140 ft. Thickness .250 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Bentonite Volume/Weight Used 150 #

Method of Installation Tremie Pipe

Depth: Placed FROM 26 ft. TO Surface ft.

GROUT

Material Bentonite Volume/Weight Used 150 #

Method of Installation Tremie Pipe

Depth: Placed FROM 26 ft. TO Surface ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown Clay	0	5
Gray Clay	5	21
Light Gray Shale	21	25
Hard Gray Shale	25	32
Broken Gray Shale/Clay	32	39
Gray Sandstone (Ext Hard)	39	44
Crevace @ 44'		
Gray Sandstone	44	47
Broken Gray Shale	47	55
Flint Rock	55	58
Gray Shale (Broken)	58	80
Gray Sandstone	80	86
Broken Gray Shale	86	137
Flint Rock		137
Water @ 44 1 1/2 gpm.		

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 5/7/04 Total Depth of Well 137 ft.