

WELL LOG AND DRILLING REPORT

975050


TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

WELL LOCATION

County Meigs Township Oline
Owner/Builder Monty Hooke
(Circle One or Both) First Last
Address of Well Location 38310 Little Forest Run Rd.
Number Street Name
City Reedsville OH. Zip Code +4 45772
Permit No. 05-05 Section/Lot No.
(Circle One or Both)
Location of Well in State Plane coordinates, if available:
N ☒ X +/- ft. or m
S ☐ Y +/- ft. or m
Elevation of Well +/- ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source
Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

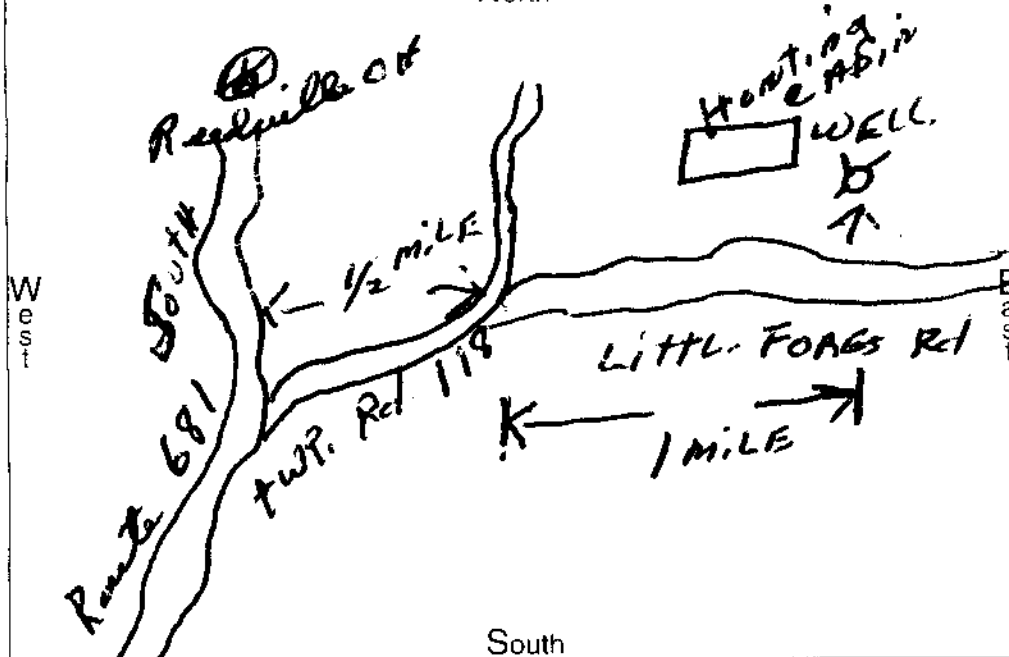

WELL TEST*

Pre-Pumping Static Level 41 ft. Date 6-28-05
Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other
☐ Air ☒ Bailing ☐ Pumping* ☐ Other
Test Rate 95 gal. per min. Duration of Test 1 hrs.
Feet of Drawdown 28 ft. Sustainable Yield gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☐ No
Quality Clear

PUMP/PITLESS

Type of pump Red Jacket Sub. Capacity 12 gpm
Pump set at 91 ft. Pitless Type Meyers Bass
Pump installed by Darrell Williams

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Darrell Williams Drilling
Address 28570 Torch Rd.
City, State, Zip Reedsville OH. 45723

Signed Darrell Williams Date 8-20-05
ODH Registration Number 1131

CONSTRUCTION DETAILS

Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 Borehole Diameter 8 inches Depth 94 ft.
Casing Diameter 6 in. Length 95 ft. Thickness SDR 20 in.
2 Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground 1 1/2 ft.
Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other
Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other
SCREEN
Diameter Slot Size 1/16 Screen Length 65-95 ft.
Type Prepacked liner Material PVC
Set Between 85 ft. and 70 ft.
GRAVEL PACK (Filter Pack)
Material/Size Pea Gravel #8 Volume/Weight Used 1800 Lbs
Method of Installation Hand washed in - DRY
Depth: Placed FROM 94 ft. TO 30 ft.
GROUT
Material Benson Volume/Weight Used 300 Lbs
Method of Installation Poured in dry
Depth: Placed FROM 3 ft. TO 30 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown Clay	0	12
Red Rock & Clay	12	24
Gray Shale	24	27
Yellow Sand Rock	27	36
Blue Shale	36	41
Gray Sand Rock	41	62
White Mountain Sand Rock	62	90
Gray Shale	90	94

Water at 42 Ft.
and at 80 Ft.

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 6-28-05 Total Depth of Well 94 ft.