

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

976126

WELL LOCATION

County Hocking Township Benton

Owner/Builder Jenifer Nellman
(Circle One or Both) First Last

Address of Well Location 25221 Chapel Ridge Rd.
Number Street Name

City S. Bloomingville Zip Code +4 43152

Permit No. 159-03 Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available:


N X +/- ft. or m

S Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation SourceSource of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat. 39°24'57" N Long 82°33'16" W

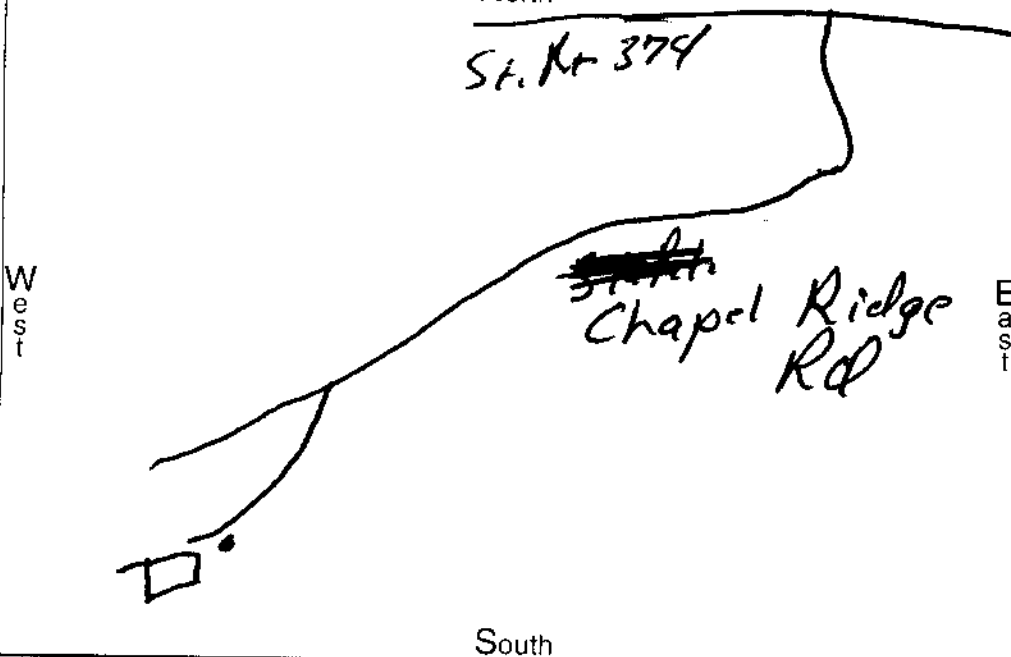

WELL TEST*

Pre-Pumping Static Level 290 ft. Date 8-20-04

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☐ Bailing ☒ Pumping* ☐ Other

Test Rate 10 gpm Duration of Test 12 hrs.

Feet of Drawdown ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Clear

PUMP/PITLESS

Type of pump Sub. Capacity 108 gpm

Pump set at 366 ft. Pitless Type Pull through

Pump installed by Driller

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Dean's Drilling

Address 19773 St. Rt. 664 S

City, State, Zip Logan Oh. 43138

Signed Deen Allie Date 11-20-04

ODH Registration Number 01840

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 Borehole Diameter 7 7/8 inches Depth 360 ft.

Casing Diameter 5 in. Length 360 ft. Thickness 3/16 in.

2 Borehole Diameter 4 7/8 inches Depth 360 ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 1 ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter ft. Slot Size ft. Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation Depth: Placed FROM ft. TO ft.

GROUT

Material E2 Seal Volume/Weight Used 18 bags

Method of Installation pumped in Tremie

Depth: Placed FROM 360 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown soil + rock	0	15
Gray Sandstone	15	35
Gray shale	35	160
Brown Sandstone	160	320
Gray sandstone	320	380

Water at 340'-380'

(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 10-20-04 Total Depth of Well 380 ft.