

WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

984005

WELL LOCATION

County Pickaway Township Walnut

Owner/Builder Patrick Myerine
(Circle One or Both) First Last

Address of Well Location ETT Noecker Rd / Jayview Acres
Number Street Name

City Ashville Zip Code +4 43103

Permit No. 05-041 Section/Lot No. 6
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Residential

N ☒ X ☐ +/- ft. or m

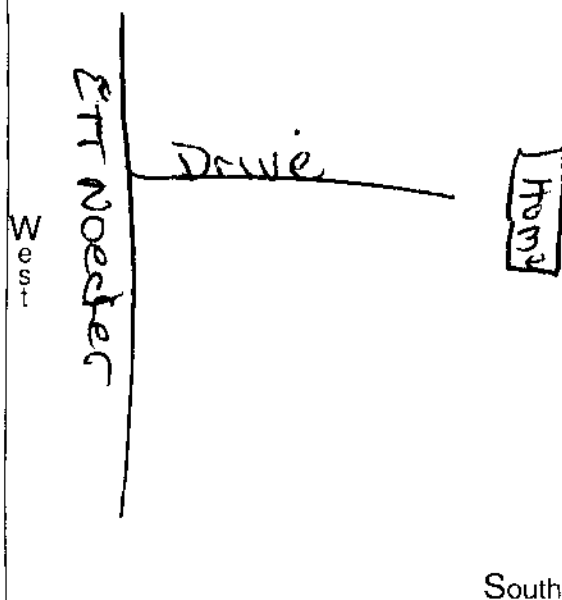
S ☐ Y ☐ +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☒ NAD83 Elevation Source GPS

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long: North

**WELL TEST***

Pre-Pumping Static Level 40 ft. Date 6-12-05

Measured from ☒ Top of Casing ☐ Ground Level ☐ Other

☒ Air ☐ Bailing ☐ Pumping* ☐ Other

Test Rate 7+/- gpm Duration of Test 1 hrs.

Feet of Drawdown 20 ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality

PUMP/PITLESS

Type of pump Other Capacity gpm

Pump set at ft. Pitless type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Smith's Well Drilling LLC

Address P.O. Box 475

City, State, Zip McArthur, OH 45651

Signed Janio Rebe Date 7-1-05

ODH Registration Number 763

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☒ Borehole Diameter 7 7/8 inches Depth 104 ft.

Casing Diameter 5 in. Length 100 ft. Thickness SDR 21 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter 5' Slot Size 50 Screen Length 3 ft.

Type slot Material PVC

Set Between 103 ft. and 100 ft.

GRAVEL PACK (Filter Pack)

Material/Size Gravel #6 Volume/Weight Used 300 lb

Method of Installation Poured

Depth: Placed FROM 104 ft. TO 103 ft.

GROUT

Material Benseal Volume/Weight Used 5/50 lb Bags @ 24 gal per

Method of Installation Pumped

Depth: Placed FROM 100 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Yellow Clay	0	11
Grey Clay & Gravel	11	32
Sand & Gravel	32	33
Grey Clay & Gravel	33	57
Grey Clay	57	100
Sand & Gravel	100	103
Grey Clay	103	104

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 6-12-05 Total Depth of Well 104 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy