

ONE (1) PER COPY
TYPE OR USE PER
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT


Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

WELL LOCATION

County Sandusky Township York
Owner/Builder Brinkley Stelley
Address or Well Location 2126 C.R. 292
City Belleme Zip Code 44811
Section/lot No.

Location of Well in State Plane coordinates, if available:
N X 41° 17' 022" E 17' 022" ft. or m
S Y 82° 53' 949" ft. or m
Elevation of Well 760 ft. or m
Datum Plane NAD83 NAO80 Elevation Source
Source of Coordinates GPS Survey Other

Sketch a map showing distance well is from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available, please include here. Lat. Long.
Rt. 20

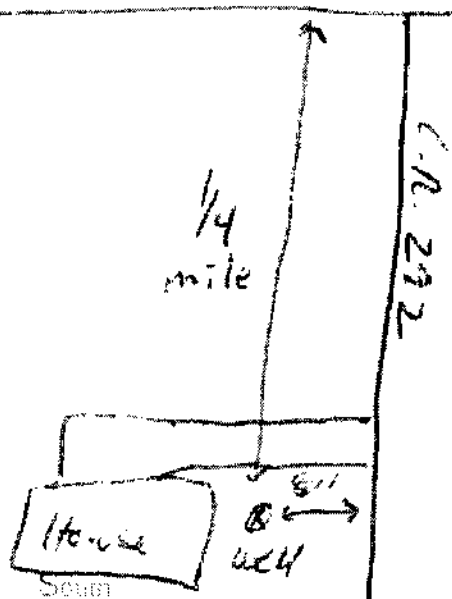

WELL TEST*

Preliminary Static Level 76 ft. Date 10/21/10
Measured from Top of Casing Ground Level Other
Casing Bailing Pumping Other
Test Rate 25+ gpm Duration of Test 1 hrs.
Level of Drawdown 140 ft. Sustainable Yield 25+ gpm
Attach a copy of the pumping test record, per section 1521.05, ORC:
Copy Attached? Yes No Flowing Well? Yes No
Quality Good

PUMP/PITLESS

Type of pump Submersible Capacity 20 gpm
Well Casing 125 ft. Pitless type pull through
Installed by Tibbels Well Drilling
I hereby certify the information given is accurate and correct to the best of my knowledge.
After Date Tibbels Well Drilling
Address 8377 Rt. 18
City/State/Zip Belleme, Oh. 44811
Signed Tom Tibbels Date 10/15/10
Dr. Registration Number 0321

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
Borehole Diameter 10 5/8 inches Depth 28 ft.
Casing Diameter 6 5/8 in. Length 28 ft. Thickness 3/16 in.
Annular Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground 1 ft.
Type Steel Galv. 1 5/8 PVC 1 Other
Joints Flared Welded 1 5/8 Solvent 1 Other

SCREEN

Diameter Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used
Method of Installation
Depth Placed FROM ft. TO ft.

GROUT

Material Bestmix Slurry Volume/Weight Used 100 gallons
Method of Installation Pump and then 1" tremie
Depth Placed FROM 28 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
<u>Sand & Gravel</u>	<u>0</u>	<u>6</u>
<u>Blue Clay</u>	<u>6</u>	<u>20</u>
<u>Limestone</u>	<u>20</u>	<u>140</u>

Dr. 10/10

If more space is needed to complete drilling log, use next consecutively numbered form.

Date of Well Completion 10/21/10 Total Depth of Well 140 ft.