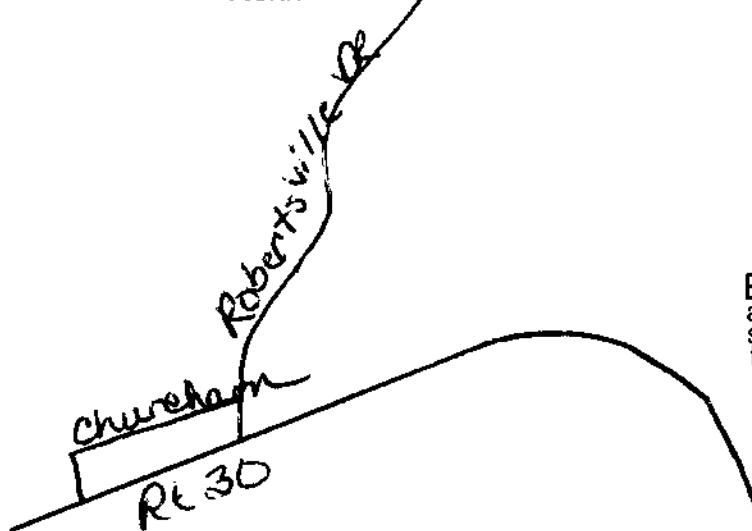


TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD**WELL LOG AND DRILLING REPORT**Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

984587

WELL LOCATIONCounty Stark Township ParisOwner/Builder Hoehn & Sons/Robert Rarric
(Circle One or Both) First LastAddress of Well Location 11271 Churchman St SE
Number Street NameCity Robertsville Zip Code +4 44670Permit No. 27106 Section/Lot No. 19
(Circle One or Both)Location of Well in State Plane coordinates, if available: Use of Well domesticN ☒ X 40:45:50 . 249 +/- 500 ft. or mS ☐ Y 81:11:25 . 415 +/- 500 ft. or mElevation of Well 1000 . 00 +/- 500 ft. or mDatum Plain: ☒ NAD27 ☐ NAD83 Elevation SourceSource of Coordinates: ☒ GPS ☐ Survey ☐ OtherSketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40 Long: 081
North

South

WELL TEST*Pre-Pumping Static Level 15 ft. Date 3-14-05Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other☐ Air ☒ Bailing ☐ Pumping* ☐ OtherTest Rate 20 gpm Duration of Test 1 hrs.Feet of Drawdown 3 ft. Sustainable Yield 20 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality

PUMP/PITLESS

Type of pump Capacity gpm

Pump set at ft. Pitless Type

Pump installed by Hoehn & Sons

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Doug Adams Well DrillingAddress 1174 Mt Pleasant RdCity, State, Zip Canton OH 44700Signed Nubbie Adams Date 3-17-05ODH Registration Number 395**CONSTRUCTION DETAILS**☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other**BOREHOLE/CASING** (measured from ground surface)1 ☐ Borehole Diameter 5 inches Depth 50 ft.Casing Diameter 5 in. Length 54 ft. Thickness 250 in.2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 3.5 - 4 ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ OtherJoints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other**SCREEN**

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUTMaterial Benseal Volume/Weight Used 3 bgsMethod of Installation dry drivenDepth: Placed FROM 50.5 ft. TO 51 ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

From To

drift	0	9
sand, gravel, clay	9	46
bkn sandstone	46	50

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy