

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

984606

WELL LOCATION

County Stark Township Pike
Owner/Builder Gary Ogley
(Circle One or Both) First Last
Address of Well Location 3245 Battletsburg Rd
Number Street Name
City E Sparta Zip Code +4 44626
Permit No. Section/Lot No.
(Circle One or Both)

Location of Well in State Plane
coordinates, if available:


Use of Well domestic

N X 40:42.13 .680 +/- 500 ft. or m
S Y 81:20.43 .199 +/- 500 ft. or m
Elevation of Well 1000 .00 +/- 500 ft. or m

Datum Plain: X NAD27 NAD83 Elevation Source

Source of Coordinates: X GPS Survey Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

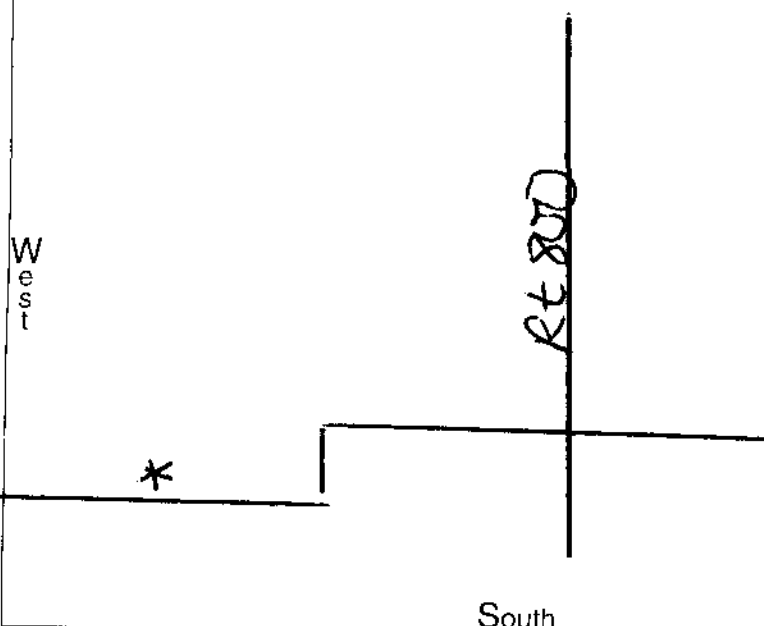

WELL TEST*

Pre-Pumping Static Level 35 ft. Date 4-8-05
Measured from: Top of Casing X Ground Level Other
☐ Air ☒ Bailing ☐ Pumping* ☐ Other
Test Rate 20 gpm Duration of Test 1 hrs.
Feet of Drawdown 10 ft. Sustainable Yield 20 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ No
Quality

PUMP/PITLESS

Type of pump Capacity gpm
Pump set at ft. Pitless Type
Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Doug Adams Well Drilling
Address 1174 Mt Pleasant NW
City, State, Zip N Canton OH 44720

Signed Debbie Adams
ODH Registration Number 395

Date 4-10-05

CONSTRUCTION DETAILS

Rotary X Cable Augered Driven Other
BOREHOLE/CASING (measured from ground surface)
1 X Borehole Diameter 5 inches Depth 113 ft.
Casing Diameter 5 in. Length 335 ft. Thickness .250 in.
2 Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground ft.
Type 1 X Steel 1 Galv. 1 PVC 1 Other
2 2 2 2
Joints 1 X Threaded 1 Welded 1 Solvent 1 Other
2 2 2 2

SCREEN

Diameter Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.

GROUT

Material Benseal Volume/Weight Used app 100#
Method of Installation dry drive
Depth: Placed FROM 335 ft. TO 81 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
gravel & clay	0	31
shale	31	51
limestone	51	53
shale	53	113