

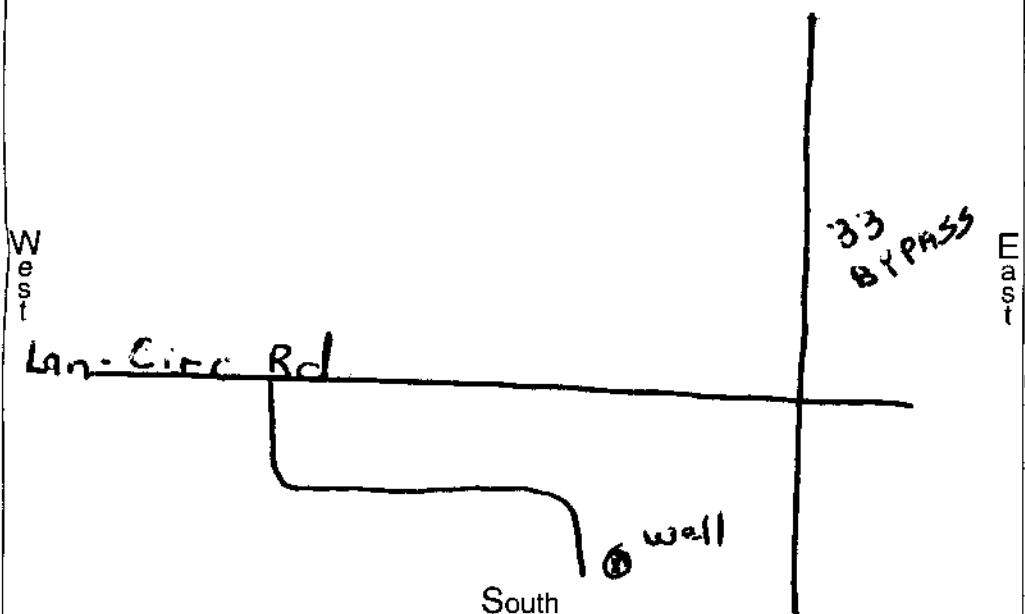
WELL LOG AND DRILLING REPORT

986151

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

WELL LOCATION

CONSTRUCTION DETAILS

County Fairfield Township HockingOwner/Builder Laura & David Stittmatter
(Circle One or Both) First LastAddress of Well Location 5145 Lanc-Circ Rd
Number Street NameCity Lancaster Zip Code +4 43130Permit No. 2006-314 Section/Lot No.
(Circle One or Both)Location of Well in State Plane
coordinates, if available:Use of Well ResidentialN ☐ X ☐ +/- ft. or mS ☐ Y ☐ +/- ft. or mElevation of Well +/- ft. or mDatum Plain: ☐ NAD27 ☐ NAD83 Elevation Source Source of Coordinates: ☒ GPS ☐ Survey ☐ Other Sketch a map showing distance well lies from numbered state highways, street
intersections, county roads, buildings or other notable landmarks. If latitude and
longitude are available please include here: Lat: 39°42'41" N Long: 82°41'54" W
North

WELL TEST*

Pre-Pumping Static Level 61' ft. Date 7-31-07Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other ☐ Air ☒ Bailing ☐ Pumping* ☐ Other Test Rate 14 gpm Duration of Test 1 1/2 hrs.Feet of Drawdown ft. Sustainable Yield 12 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ NoQuality Clear

PUMP/PITLESS

Type of pump Submersible Capacity 10 gpmPump set at 90' ft. Pitless Type AdapterPump installed by Buckeye Valley

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Buckeye Valley Well DrillingAddress 10122 Tarlton RdCity, State, Zip Circleville Ohio 43113Signed [Signature] Date 7-31-07ODH Registration Number 001516☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 5" inches Depth 105' ft.Casing Diameter 5" in. Length 85' ft. Thickness .244 in.2 ☐ Borehole Diameter inches Depth ft.Casing Diameter in. Length ft. Thickness in.Casing Height Above Ground 24" ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐2 ☐ 2 ☐ 2 ☐ 2 ☐ Other Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.Type Material Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO ft.

GROUT

Material Benseal Volume/Weight Used 270 #/bsMethod of Installation Back filled as DrivenDepth: Placed FROM 83' ft. TO Surface ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown Sandy Clay	0	18'
(DRY) Brown Sand & Gravel	18'	31'
Brown Clay	31'	34'
(DRY) Brown Sand & Gravel	34'	71'
GRAY Clay	71'	75'
GRAY Sandstone	75'	81'
Brown Sandstone	81'	105'

First water at 87'

Second water at 96'

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 7-31-07 Total Depth of Well 105 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy