

WELL LOG AND DRILLING REPORT


988706

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

WELL LOCATION

County Stark Township Canal Fulton
 Owner/Builder Schulino Homes
 Address of Well Location 8070 Leaver Rd.
 City Canal Fulton Zip Code 44614
 Permit No. 21795 Section/Lot No. res
 Location of Well in State Plane coordinates, if available:
 N X S Y +/- ft. or m
 Elevation of Well +/- ft. or m
 Datum Plain: NAD27 NAD83 Elevation Source GPS
 Source of Coordinates: X GPS Survey Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40°53,98 Long: 081°35,70

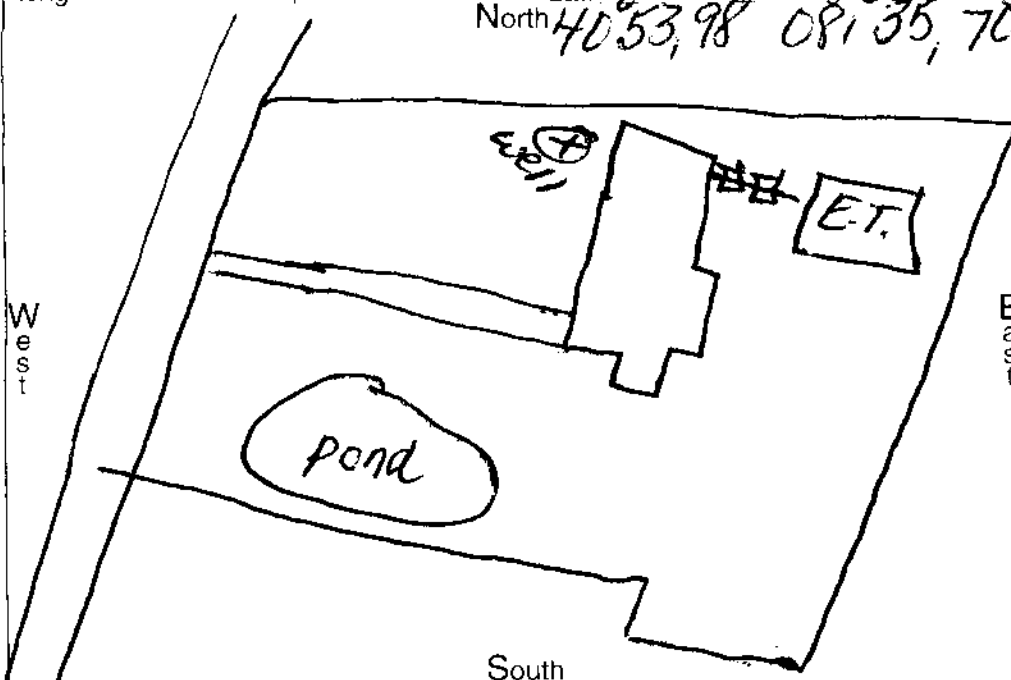

WELL TEST*

Pre-Pumping Static Level 12 ft. Date 6/01/05
 Measured from: X Top of Casing X Ground Level Other
Air Bailing Pumping* Other
 Test Rate 20 gpm Duration of Test 20 hrs.
 Feet of Drawdown 3 ft. Sustainable Yield 20 gpm
 *(Attach a copy of the pumping test record, per section 1521.05, ORC)
 Is Copy Attached? Yes X No X Flowing Well? Yes X No X
 Quality Clear

PUMP/PITLESS

Type of pump Capacity gpm
 Pump set at ft. Pitless Type ft.
 Pump installed by Anderson Drilling & Pump, Inc.

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Anderson Drilling & Pump, Inc.
 Address PO Box 1666
 City, State, Zip Stow, OH 44224

Signed Shannon Regan Date 6/07/05
 ODH Registration Number 94

CONSTRUCTION DETAILS

Rotary X Cable Augered Driven Other
 BOREHOLE/CASING (measured from ground surface)
 1 X Borehole Diameter 5.5 inches Depth 34 ft.
 Casing Diameter 5.5 in. Length 30.5 ft. Thickness .258 in.
 2 Borehole Diameter inches Depth ft.
 Casing Diameter in. Length ft. Thickness in.
 Casing Height Above Ground ft.
 Type 1 X Steel 1 Galv. 1 PVC 1 Other
 2 Galv. 2 PVC 2 Other
 Joints 1 X Threaded 1 Welded 1 Solvent 1 Other
 2 Threaded 2 Welded 2 Solvent 2 Other
 SCREEN
 Diameter 4" Slot Size .020 Screen Length 6 ft.
 Type Stainless Material Gravel
 Set Between 24 ft. and 30 ft.

GRAVEL PACK (Filter Pack)

Material/Size Gravel Volume/Weight Used 50#
 Method of Installation Packer
 Depth: Placed FROM 0 ft. TO 25 ft.
 GROUT
 Material Bentonite Volume/Weight Used 50#
 Method of Installation Packer
 Depth: Placed FROM 0 ft. TO 25 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
br. clay / sand	0	12
gr. clay	12	21
STG	21	34