

**WELL LOG AND DRILLING REPORT**TYPE OR USE PEN  
SELF TRANSCRIBING  
PRESS HARDOhio Department of Natural Resources  
Division of Water, 1939 Fountain Square Drive  
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

989190

**WELL LOCATION**County Ashtabula Township JeffersonOwner/Builder (Circle One or Both) Norman Rausch  
First LastAddress of Well Location 1643 SR 46 N.  
Number Street NameCity Jefferson Zip Code +4 44047Permit No. 172 Section/Lot No. (Circle One or Both)

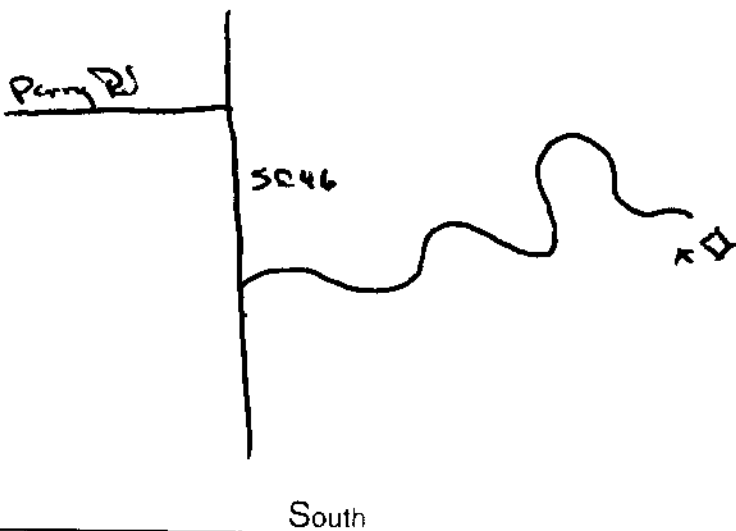
Location of Well in State Plane coordinates, if available:

N ☒ X ☐ +/- ft. or mS ☐ Y ☐ +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation SourceSource of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: North Long:

**WELL TEST\***Pre-Pumping Static Level 10 ft. Date 9-19-05Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other☐ Air ☒ Bailing ☐ Pumping\* ☐ OtherTest Rate 0.5 gpm Duration of Test 48 hrs.Feet of Drawdown 5.8 ft. Sustainable Yield 0.5 gpm

\*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ NoQuality Clear**PUMP/PITLESS**Type of pump Submersible Capacity 10 gpmPump set at 55 ft. Pitless Type pull thru

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Rapala Inc.Address 3605 SR 167 ECity, State, Zip Jefferson OH 44047Signed Russell J. Rapala Date 11-12-05ODH Registration Number 619**CONSTRUCTION DETAILS**Rotary ☐ Cable ☒ Augered ☐ Driven ☐ Other**BOREHOLE/CASING** (measured from ground surface)1 Borehole Diameter 8 inches Depth 60 ft.Casing Diameter 8.75 in. Length 20 ft. Thickness 0.386 in.

2 Borehole Diameter \_\_\_\_\_ inches Depth \_\_\_\_\_ ft.

Casing Diameter \_\_\_\_\_ in. Length \_\_\_\_\_ ft. Thickness \_\_\_\_\_ in.

Casing Height Above Ground 2 ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐2 ☐ 2 ☐ 2 ☐ 2 ☐ OtherJoints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐2 ☐ 2 ☐ 2 ☐ 2 ☐ Other**SCREEN**

Diameter \_\_\_\_\_ Slot Size \_\_\_\_\_ Screen Length \_\_\_\_\_ ft.

Type \_\_\_\_\_ Material \_\_\_\_\_

Set Between \_\_\_\_\_ ft. and \_\_\_\_\_ ft.

**GRAVEL PACK** (Filter Pack)

Material/Size \_\_\_\_\_ Volume/Weight Used \_\_\_\_\_

Method of Installation \_\_\_\_\_

Depth: Placed FROM \_\_\_\_\_ ft. TO \_\_\_\_\_ ft.

**GROUT**Material Bentonite Volume/Weight Used 400Method of Installation dry drivenDepth: Placed FROM 0 ft. TO 20 ft.**DRILLING LOG\***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:  
sandstone, shale, limestone, gravel, clay, sand, etc.Brown ClayGray ClayShaleWater @

From To

0 1212 2020 6025 60Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.  
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971  
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy