


WELL LOCATION

County Portage Township Palmyra
Owner/Builder Santino Pizzuto
First Last
Address of Well Location 8363 Fishers Rd
Number Street Name
City Ravenna Oh Zip Code +4 44412
Permit No. 19139 Section/Lot No. _____
(Circle One or Both)
Location of Well in State Plane coordinates, if available: Use of Well
N ☐ X 41° 07.187 +/- _____ ft. or m
S ☐ W Y 081° 05.379 +/- _____ ft. or m
Elevation of Well 1072 +/- _____ ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source _____
Source of Coordinates: ☒ GPS ☐ Survey ☐ Other _____

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: _____ Long: _____

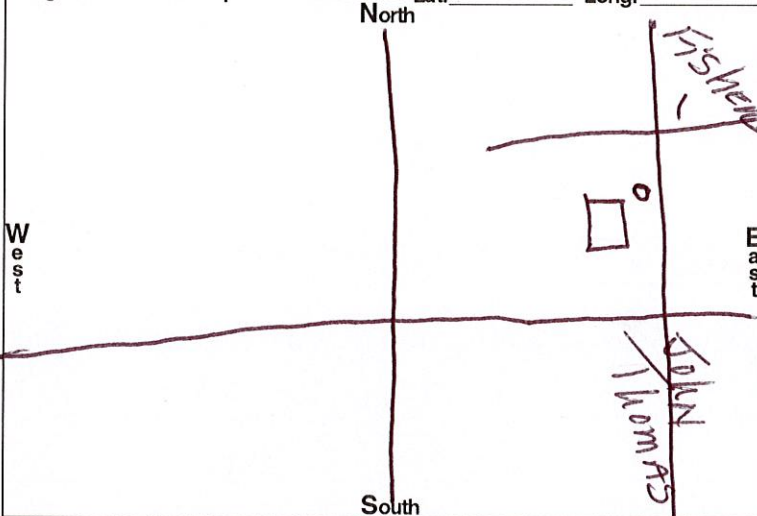

WELL TEST*

Pre-Pumping Static Level 8 ft. Date 10-14-2019
Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other _____
☐ Air ☐ Bailing ☐ Pumping* ☐ Other _____
Test Rate 25 gpm Duration of Test 2 hrs.
Feet of Drawdown 20 ft. Sustainable Yield 22 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No
Quality Clear

PUMP/PITLESS

Type of pump 1/2 Capacity 10 gpm
Pump set at 80 ft. Pitless Type Summers
Pump installed by Jim Templeton

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Templeton Well Drilling
Address 4703 Fullinwade Rd
City, State, Zip Rootstown, Ohio 44272

Signed Jim Templeton Date 10-16-19
ODH Registration Number 676

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other _____

BOREHOLE/CASING (measured from ground surface)

1 Borehole Diameter 8 inches Depth 30 ft.
Casing Diameter 5 in. Length 31 ft. Thickness 1/4 in.
2 Borehole Diameter 5 inches Depth 101 ft.
Casing Diameter _____ in. Length _____ ft. Thickness _____ in.
Casing Height Above Ground _____ ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other _____
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other _____
Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐ Other _____
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other _____

SCREEN

Diameter _____ Slot Size _____ Screen Length _____ ft.
Type _____ Material _____
Set Between _____ ft. and _____ ft.

GRAVEL PACK (Filter Pack)

Material/Size _____ Volume/Weight Used _____
Method of Installation _____
Depth: Placed FROM _____ ft. TO _____ ft.

GROUT

Material Granular Portland Cement Volume/Weight Used 250
Method of Installation Dry Drilled
Depth: Placed FROM 0 ft. TO 30 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
<u>Yellow Clay</u>	<u>0</u>	<u>7</u>
<u>Brown Sand. Stone</u>	<u>7</u>	<u>26</u>
<u>Hard Shale</u>	<u>26</u>	<u>48</u>
<u>Sandy Shale</u>	<u>48</u>	<u>101</u>

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy