

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

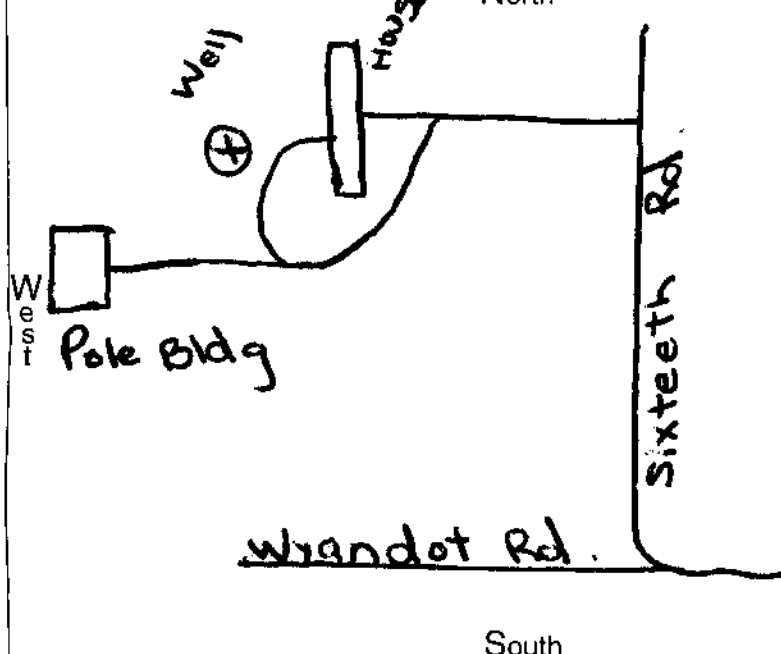
986145

WELL LOCATION

CONSTRUCTION DETAILS

County Fairfield Township Clear creekOwner/Builder Barry Fowler
(Circle One or Both) First LastAddress of Well Location 7145 Sixteenth Rd.
Number Street NameCity Amanda Zip Code +4 43102Permit No. 2006-276 Section/Lot No. _____
(Circle One or Both)Location of Well in State Plane
coordinates, if available:N ☐ X ☐ +/- _____ ft. or mS ☐ Y ☐ +/- _____ ft. or m

Elevation of Well +/- _____ ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source _____Source of Coordinates: ☒ GPS ☐ Survey ☐ Other _____Sketch a map showing distance well lies from numbered state highways, street
intersections, county roads, buildings or other notable landmarks. If latitude and
longitude are available please include here: Lat 39-37-49 Long 82-47-30
North

South

WELL TEST*

Pre-Pumping Static Level 41' ft. Date 3-8-07Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other _____☐ Air ☒ Bailing ☐ Pumping* ☐ Other _____Test Rate 12 gpm Duration of Test 2 1/2 hrs.Feet of Drawdown _____ ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ NoQuality Clear

PUMP/PITLESS

Type of pump Submersible Capacity 10 gpmPump set at 70' ft. Pitless Type AdapterPump installed by Buckeye Valley Inc

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Buckeye Valley Well Drilling IncAddress 10122 Tarlton Rd.City, State, Zip Cirdeville, Ohio, 43113Signed Chris Gabel Date 3-8-07ODH Registration Number 001516☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other _____

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 8 1/4 inches Depth 43-6" ft.Casing Diameter 5" in. Length 45' ft. Thickness .244 in.2 ☐ Borehole Diameter 5" inches Depth 80' ft.

Casing Diameter _____ in. Length _____ ft. Thickness _____ in.

Casing Height Above Ground 18" ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐2 ☐ 2 ☐ 2 ☐ 2 ☐ Other _____Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐2 ☐ 2 ☐ 2 ☐ 2 ☐ Other _____

SCREEN

Diameter _____ Slot Size _____ Screen Length _____ ft.

Type _____ Material _____

Set Between _____ ft. and _____ ft.

GRAVEL PACK (Filter Pack)

Material/Size _____ Volume/Weight Used _____

Method of Installation _____

Depth: Placed FROM _____ ft. TO _____ ft.

GROUT

Material 3/8 Hole Pkg Bentonite Volume/Weight Used (18 Bags) 900 lbsMethod of Installation Pour methodDepth: Placed FROM 43-6" ft. TO Surface ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown Clay	0	12'
Yellow Sand & Gravel	12'	14'
Broken Soft Sandstone	14'	20'
Brown Sandstone	20'	35
Gray Sandstone	35	49
Dark Brown Sandstone	49'	61
Yellow Sandstone	61'	74
GRAY Sandstone	74	80'

(1st)

Water Between

12' - 43' - 6"

was Cased out

(2nd)

Water at 71'

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 3-8-07 Total Depth of Well 80' ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy