

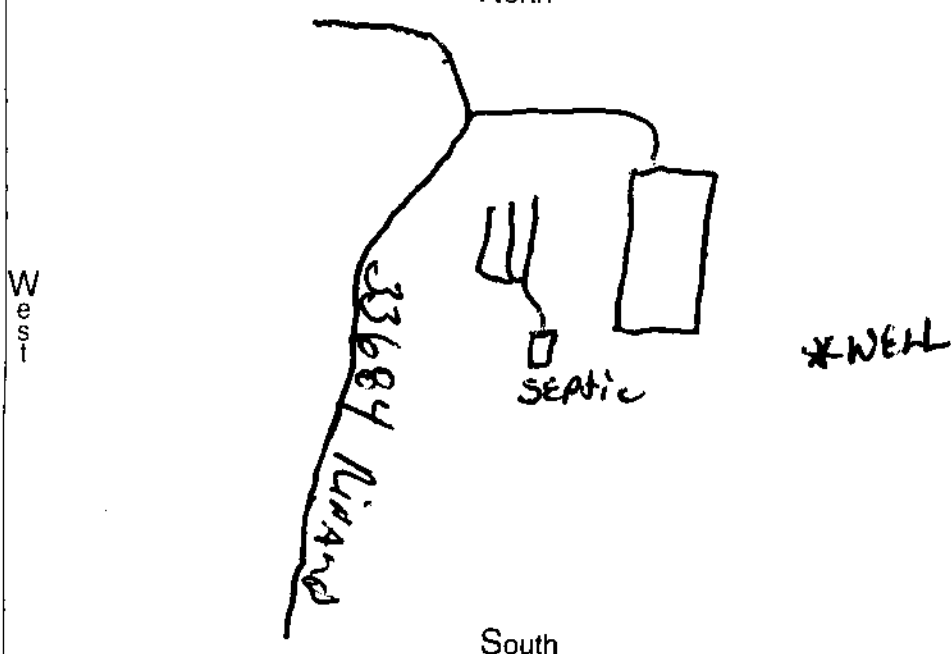
WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources

Division of Water, 2045 Morse Road

Columbus, Ohio 43229-6605 Voice (614) 265-6740 Fax (614) 265-6767

0997317

WELL LOCATIONCounty MONROE Township WASHINGTONOwner/Builder COLES MOBILE HOMES
(Circle One or Both) First LastAddress of Well Location 33684 Rivard Mill Rd.
Number Street NameCity NEW MATAMORAS Zip Code +4 45767Permit No. #14 Section/Lot No. _____
(Circle One or Both)Location of Well in State Plane
coordinates, if available:N ☐ X ft. or mS ☐ Y ft. or mElevation of Well 723.00 +/- 27 ft. or mDatum Plain: ☐ NAD27 ☒ NAD83 Elevation Source GPSSource of Coordinates: ☒ GPS ☐ Survey ☐ OtherSketch a map showing distance well lies from numbered state highways, street
intersections, county roads, buildings or other notable landmarks. If latitude and
longitude are available please include here: Lat. N 39° 35' 18" 08189.191
North**WELL TEST***Pre-Pumping Static Level 50 ft. Date 11/11/05Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other☒ Air ☐ Bailing ☐ Pumping* ☐ OtherTest Rate 1+/- gpm Duration of Test 2 hrs.Feet of Drawdown 100% ft. Sustainable Yield 14- gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ NoQuality clean**PUMP/PITLESS**Type of pump Sub Capacity 7 gpmPump set at 170' ft. Pitless Type Foot-onPump installed by Smith Well Org. Inc.

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Smith Water Well LLC.Address P.O. Box 475City, State, Zip McArthur, OK 45651Signed Shawn Egan Smith Well LLC. Date 11-15-05ODH Registration Number #763**CONSTRUCTION DETAILS**☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other**BOREHOLE/CASING** (measured from ground surface)1 ☐ Borehole Diameter 8 3/4 inches Depth 25 ft.Casing Diameter 6 in. Length 26 ft. Thickness 50x21 in.2 ☐ Borehole Diameter 5 5/8 inches Depth 25' - 183' ft.Casing Diameter 4 in. Length 173 ft. Thickness 50x21 in.Casing Height Above Ground 18" ft.Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐2 ☐ Steel 2 ☐ Galv. 2 ☒ OtherJoints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐2 ☐ Threaded 2 ☐ Welded 2 ☒ Other**SCREEN**Diameter Slot Size Screen Length ft.Type Material Set Between ft. and ft.**GRAVEL PACK** (Filter Pack)Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO ft.**GROUT**Material BENSEAL Volume/Weight Used 2-50LB @ 25' perMethod of Installation Pressure groutDepth: Placed FROM 25' FT ft. TO Surface ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
BROWN CLAY	0	11
BROWN CLAY w/ GRAVEL	11	20
BROWN SANDSTONE	20	28
GRAY SHALE	28	99
RED SHALE	99	105
HARD GRAY SHALE	105	158
SOFT GRAY SHALE	158	183

H₂O AT 27' Approx. Depth
99' " "

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 11-11-05 Total Depth of Well 183 ft.Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 2045 MORSE ROAD, COLS., OHIO 43229-6605
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy