

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

WELL LOCATION

CONSTRUCTION DETAILS

County Greene Township Harrison

Owner/Builder Adam Warren
(Circle One or Both) First Last

Address of Well Location 1107 Woodie Road
Number Street Name

City Patrol Zip Code 45658

Permit No. 2018002 Section/Lot No.
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Deer Hunting Camp

N ☒ X 38° 42' 55" +/- ft. or m


W ☒ Y 82° 18' 41" +/- ft. or m

Elevation of Well 884 +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

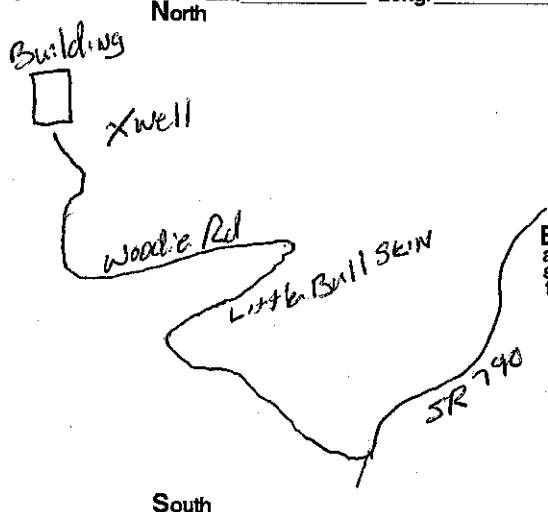

WELL TEST*

Pre-Pumping Static Level 28 ft. Date 8-24-18

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 1.0 gpm Duration of Test 2 hrs.

Feet of Drawdown ft. Sustainable Yield 1.5 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Fair, Iron, Hardness

PUMP/PITLESS

Type of pump Submersible Capacity gpm

Pump set at 155 ft. Pitless Type Through Casing

Pump installed by Ron Johnson Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Ron Johnson Drilling

Address 258 Rt. 615

City, State, Zip Franklinville OH

Signed Ron Johnson Date 8-24-18

ODH Registration Number 01923

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☒ Borehole Diameter 10 inches Depth 25 ft.

Casing Diameter 6 in. Length 25 ft. Thickness 98 in.

2 ☒ Borehole Diameter 6 inches Depth 160 ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 24" ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN N/A

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack) N/A

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material Coarse Bentonite Volume/Weight Used 575#

Method of Installation Dry Pour

Depth: Placed FROM Pitless ft. TO 25 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Clay, Loam	0	8
Sandstone Brown Firm	8	14
Brown Shale, soft, coal	14	20
Grey Shale soft	20	35
Grey Blue Shale Hard - "Water"	35	50
Limestone light Grey Hard	50	58
Grey Shale Hard	58	65
Brown shale soft	65	72
light grey sandy firm	72	118
Brown shale	118	129
Grey blue shale Firm	129	134
Brown shale soft	134	150
Grey sandy firm	150	154
Brown shale soft	154	160

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 8-24-18 Total Depth of Well 160 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy