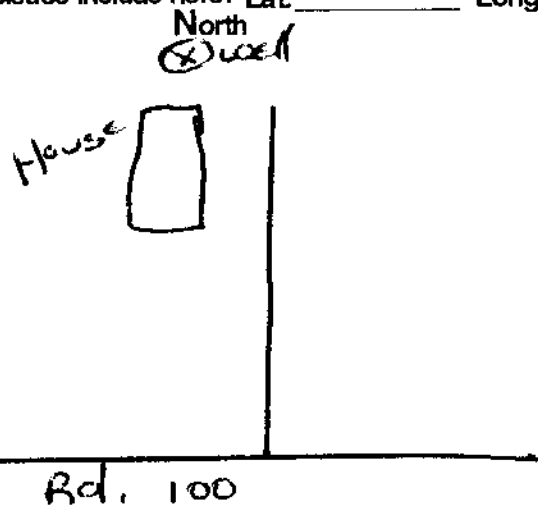


WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

1015662

WELL LOCATION

County MORROW Township CONGRESSOwner/Builder Bob Trench
(Circle One or Both) First LastAddress of Well Location 6300 CB 100
Number Street NameCity MT Gilead Zip Code 43015Permit No. 20110025 Section/Lot No.
(Circle One or Both)Location of Well in State Plane coordinates, if available: Use of Well ResidentialN ☐ X +/- ft. or mS ☐ Y +/- ft. or mElevation of Well +/- ft. or mDatum Plain: ☐ NAD27 ☐ NAD83 Elevation Source Source of Coordinates: ☐ GPS ☐ Survey ☐ Other Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long: 

West

South

WELL TEST*

Pre-Pumping Static Level 58' ft Date 1-2-12Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other ☐ Air ☒ Bailing ☐ Pumping* ☐ Other Test Rate 16 gpm Duration of Test 2 hrs.Feet of Drawdown 2' ft Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ NoQuality Clear

PUMP/PITLESS

Type of pump Submersible Capacity 12 gpmPump set at 78' ft Pitless Type AdapterPump installed by Tom Gabel Well Drilling LLC

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Tom Gabel Well Drilling LLCAddress 10919 Cincinnati Zanesville Rd.City, State, Zip Amadora, Ohio, 43102Signed [Signature] Date 1-2-12ODH Registration Number 108

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 5" inches Depth 98' ft
Casing Diameter 5" in. Length 94.6' ft Thickness .244 in.2 ☐ Borehole Diameter inches Depth ft
Casing Diameter in. Length ft Thickness in.Casing Height Above Ground 18" ftType 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other 2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other 2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 4" Slot Size .040 Screen Length 5' ftType Telescope Material PVCSet Between 94 ft and 98' ft

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft TO ft

GROUT

Material Benseal Volume/Weight Used 225 lbsMethod of Installation Backfilled as DrivenDepth: Placed FROM 94 ft TO 98' ft

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown Clay	0	26'
GRAY CLAY	26'	38'
BROWN DRY GRAVEL	38'	41'
GRAY CLAY	41'	94'
Sand, GRAVEL & WATER	94'	98'

302917 JUL 31 12

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 1-2-12 Total Depth of Well 98' ft

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy