DNR 7802.10

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Divison of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

1017505

WELL LOCATION

County ASHLAND Township Milton

Owner/Builder (Circle One or Both) RICHARD (First) HILLER (Last)

Address of Well Location 1231 (Number) TR 1426 (Street Name)

City ASHLAND Zip Code +4 44805

Permit No. 9535 Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well HOUSEHOLD

N ☐ X 40° 51. 267 +/- 19 ft. or m

S ☐ Y 082 21. 784 +/- ft. or m

Elevation of Well 1199. +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☑ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

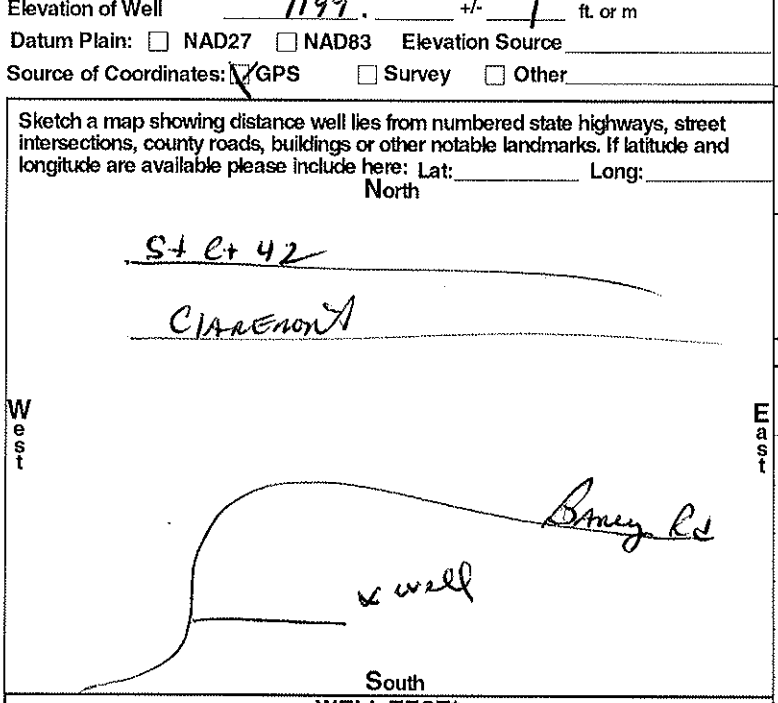

WELL TEST*

Pre-Pumping Static Level 40 ft. Date 10-1-14

Measured from: ☐ Top of Casing ☑ Ground Level ☐ Other

☐ Air ☑ Bailing ☐ Pumping* ☐ Other

Test Rate 10 gpm Duration of Test 10 hrs.

Feet of Drawdown 60 ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☑ No Flowing Well? ☐ Yes ☐ No

Quality

PUMP/PITLESS

Type of pump SUB Capacity 10 gpm

Pump set at 130 ft. Pitless Type ~~Dreyers~~ SIMMONS

Pump installed by REX DONALDSON

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm REX DRILLING

Address 2038 STONE GATE CT

City, State, Zip ASHLAND OH 44805

Signed REX DONALDSON Date 10-13-14

ODH Registration Number 588

CONSTRUCTION DETAILS

☐ Rotary ☑ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 6 inches Depth 72 ft.

Casing Diameter 5 in. Length 72 ft. Thickness .244 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 18" ft.

Type 1 ☑ 2 ☐ Steel 1 ☐ 2 ☐ Galv. 1 ☐ 2 ☐ PVC 1 ☐ 2 ☐ Other

Joints 1 ☑ 2 ☐ Threaded 1 ☐ 2 ☐ Welded 1 ☐ 2 ☐ Solvent 1 ☐ 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material BENTONITE Volume/Weight Used 150 LBS

Method of Installation DRY DRIVEN

Depth: Placed FROM 0 ft. TO 72 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.	From	To
TOP SOIL	0	5
BROWN CLAY	5	17
GRAY CLAY	17	35
GRAY CLAY + GRAVEL	35	70
GRY SHALE	70	110
GRY SAND ROCK	110	140

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 10-1-14 Total Depth of Well 140 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy