

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

1022554

WELL LOCATION

County CARROLL Township ORANGE

Owner/Builder LES EICK
(Circle One or Both) First Last

Address of Well Location 3042 AMSTERDAM RO
Number Street Name

City BOWERSTON Zip Code +4 44695

Permit No. 47-2025 Section/Lot No. 23
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well 1 FAM. DWELLING

N ☐ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well 1182 +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source GOOGLE EARTH

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other GOOGLE EARTH

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40° Long: 91°

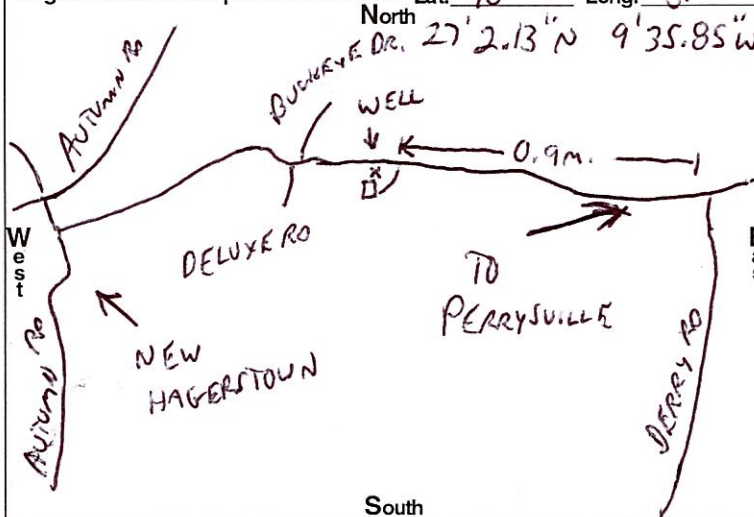

WELL TEST*

Pre-Pumping Static Level 137 ft. Date 10-27-25

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 2 gpm Duration of Test hrs.

Feet of Drawdown 189 ft. Sustainable Yield 2 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☒ No

Quality CLEAR, NO OIL

310' 1" SCH 40 PVC PUMP/PITLESS

Type of pump MYERS SUB. 1HP Capacity 8 gpm

Pump set at 316 ft. Pitless Type MERRILL PUMP THRU

Pump installed by SPEEDY DRILLING CO. LLC

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm SPEEDY DRILLING CO. LLC

Address 3100 MACAW RD NE

City, State, Zip CARROLLTON OH 44615

Signed C. P. Sany Date 11-16-25

ODH Registration Number 135

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 Borehole Diameter 7 inches Depth 25 ft.
Casing Diameter 6 1/4 10 in. Length 26 ft. Thickness 198 in.

2 Borehole Diameter 6 inches Depth 326 ft.
Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material UNKNOWN Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED. Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.		From	To
LOG # 103409	5/26/1953	0	85
LOG # 411962	9/28/1970	85	110
LOG # 799325	8/20/1994	110	145
LIGHT GRAY SAND ROCK		145	170
SOFT DARK SHALE		170	215
LIGHT GRAY LIMY SANDY SHALE		215	230
LIGHT GRAY LIMY SAND ROCK		230	265
LIMY SANDY SHALE		265	287
LIMESTONE		287	296
LIMY SAND ROCK		296	326

WELL MADE 2 GPM @ 145'

BAILED 344 GAL IN 19 MIN @ 326' TO

INSTALLED 320' PERFORATED LINER

SHALE TRAPS AT 70'

TOP 65' IS 4" SOR 21 BOTTOM 285' IS 4 1/2" SOR 26

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 11-1-2025 Total Depth of Well 326 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy