

COUNTY Mahoning

TOWNSHIP Berlin Center

SECTION/LOT No. _____
(CIRCLE ONE)

OWNER/BUILDER
(CIRCLE ONE OR BOTH)

Robert Stensrud

PROPERTY ADDRESS

15250 Mock Road
(ADDRESS OF WELL LOCATION A)

LOCATION OF PROPERTY

3/8 Mile East of Rt 534, 1/10 mile North of Mock Rd

CONSTRUCTION DETAILS

CASING

1 Diameter 6" I.P. in. Length 53' ft. Wall Thickness 0.188 in.

2 Diameter _____ in. Length _____ ft. Wall Thickness _____ in.

Type: ☒ Steel ☐ Galv. ☐ PVC ☐ Other _____

Joints: ☐ Threaded ☒ Welded ☐ Solvent ☐ Other _____

Liner: Length 216' Type 4" PVC Wall Thickness Sch 40 in.

SCREEN Packer's AT 60' and 160'

Type (wire wrapped, louvered, etc.) _____ Material _____

Length _____ ft. Diameter _____ in.

Set between _____ ft. and _____ ft. Slot _____

GROUT

Material Natural Volume used _____

Method of installation _____

Depth: placed from _____ ft. to _____ ft.

GRAVEL PACK (Filter Pack)

Material _____ Volume used _____

Method of installation _____

Depth: placed from _____ ft. to _____ ft.

Pitless Device ☒ Adapter ☐ Preassembled unit

Use of Well Single family Home

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Dug ☐ Other _____

Date of Completion 1-4-92

WELL LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Clay	0	30
Gravel, Sand	30	34
Shale Soft	34	49
Sandstone Black	49	51
Shale, fire clay	51	57
Shale Gray Hard	57	70
Coal	70	72
Shale, fire clay	72	86
Sandy shale, Thin layers sandstone	86	95
Shale, Sandy shale, soft shale	95	146
Sandstone Gray, white	146	159
Sandy shale	159	177
Black shale, Sandy shale	177	190
Sandstone Gray white Porous	190	195
Sandy shale	195	213
Sandstone Quartz pebbles	213	220
Sandy shale, Thin layers sandstone	220	239
Sandstone white, Sandy shale	239	250
Shale, Sandy shale	250	260
180' GPM, 220' 46 GPM		

WELL TEST

☒ Bailing ☐ Pumping* ☐ Other _____

Test rate 10 gpm Duration of test 2 hrs.

Drawdown _____ ft.

Measured from: ☐ top of casing ☒ ground level ☐ Other _____

Static Level (depth to water) 28' ft. Date: 11-23-91

Quality (clear, cloudy, taste, odor) Sulphur odor

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

PUMP


Type of pump Sub Capacity 10 gpm

Pump set at 245' ft.

Pump installed by Economy Well Drillers

SKETCH SHOWING WELL LOCATION

Show distances well lies from numbered state highways,
street intersections, county roads, etc.

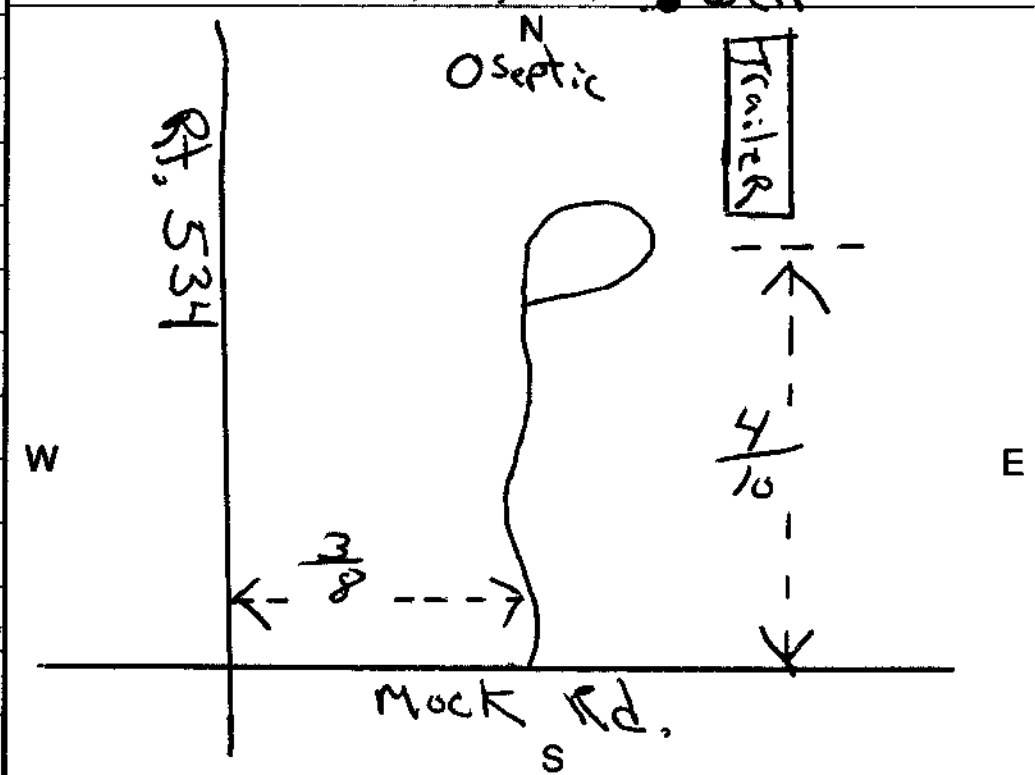

*If additional space is needed to complete well log, use next consecutively numbered form.

DNR 7802.90

Drilling Firm Economy Well Drillers

Signed V.C. Bidwell

Address 3946 James Drive

Date 1-16-92

City, State, Zip Vienna, Ohio 44473

ODH Registration Number 399

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy