

WELL LOG AND DRILLING REPORT

830326

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224 Phone (614) 265-6739

Permit Number 173046

COUNTY Tuscarawas

TOWNSHIP Franklin

SECTION/LOT No. S.E.-7
(Circle One)

OWNER/BUILDER Rick Noland
(Circle One or Both) First Last

PROPERTY ADDRESS 10658 Stras. Bolivar Rd. Bolivar
(Address of well location) Number Street City

LOCATION OF PROPERTY 3 miles North East Strasburg Ohio Off County #99 44612-9801
Zip Code + 4

CONSTRUCTION DETAILS

CASING (Length below grade) Borehole Diameter <u>8 1/2</u> in. <u>APP 1/4"</u>		GROUT
1 Diameter <u>6</u> in. Length <u>6</u> ft. Wall Thickness <u>APP 1/4"</u> in.	Material <u>Fire Clay</u>	Volume used <u>1400 lb.</u>
2 Diameter <u>5</u> in. Length <u>46</u> ft. Wall Thickness <u>APP 1/4"</u> in.	Method of installation	
Type: 1 Steel 2 Galv. 1 PVC 2 Other	Depth: placed from <u>-4'</u> ft. to <u>-50'</u> ft.	
Joints: 1 Threaded 2 Welded 1 Solvent 2 Other	GRAVEL PACK (Filter Pack)	
Liner: Length <u>60</u> Type <u>4" PVC</u> Wall Thickness <u>.187</u> in.	Material	Volume used
SCREEN	Method of installation	
Type (wire wrapped, louvered, etc.)	Depth: placed from	ft. to
Length	Pitless Device ☒ Adapter ☐ Preassembled unit	
Set between	Use of Well <u>All Brass Pitless</u>	
	☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Dug ☐ Other	
	Date of Completion	

WELL LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.	
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.	From To
Sub Soil Brown	0 10'
Sand Stone Brown-Hard	10' 31'
Shale Dark - Hard	31' 42'
(W) 2 Gal Per Hour	31-33
Sandy Shale Hard Gray	42 55
Mostly Darker	55
Soft Shale With (Water)	
Layers of Sandrock	
Few Inches At Times	70
Mostly Dark Softer Shale	70 83

WELL TEST


☐ Bailing	☒ Pumping	☐ Other
Test rate <u>30</u> gpm	Duration of test <u>20</u> hrs.	
Drawdown <u>42'</u> ft.		
Measured from: ☐ top of casing ☒ ground level ☐ Other		
Static Level (depth to water) <u>20'</u> ft.	Date:	
Quality (clear, cloudy, taste, odor) <u>Iron 3 1/2 parts</u>		
<u>120 Grain Hard, Ph 6.3</u>		
*(Attach a copy of the pumping test record, per section 1521.05, ORC)		

PUMP

Type of pump <u>1/2 hp Sub.</u>	Capacity <u>30 @ 0-Head</u> gpm
Pump set at <u>63'</u>	
Pump installed by <u>Bloo Drilling</u>	

WELL LOCATION

Location of well in State Plane coordinates, if available:	
Zone <u>x</u>	y
Elevation of well	ft./m. Datum plain: ☐ NAD27 ☐ NAD83
Source of coordinates: ☐ GPS ☐ Survey ☐ Other	
Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks.	

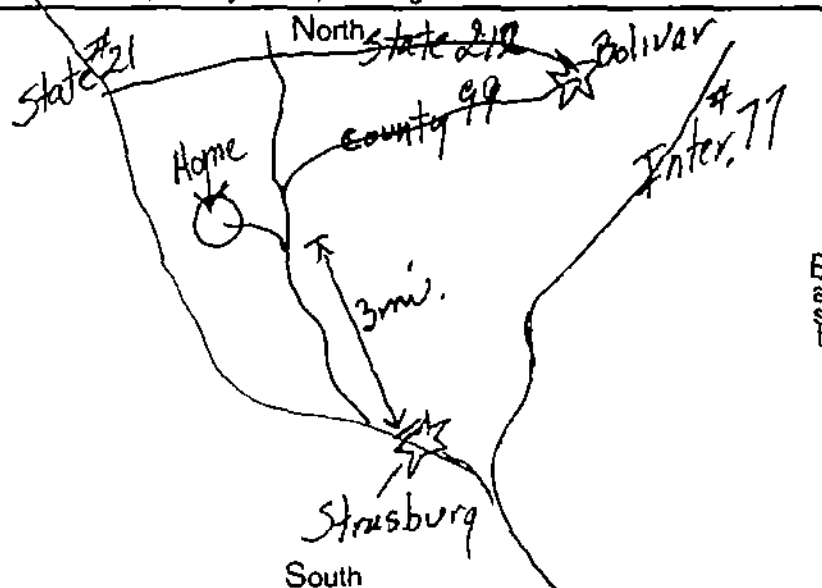

(If additional space is needed to complete well log, use next consecutively numbered form.) I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Bloo Drilling
Address 10722 Shelden Rd. N.W.
City, State, Zip Bolivar Ohio 44612

Signed Thomas Parker
Date 11-25-95
ODH Registration Number #482