

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

864014

WELL LOCATION

County STARK Township PLAIN

Owner/Builder DREW HELLER
(Circle One or Both) First Last

Address of Well Location 1636 APPLEGROVE
Number Street Name

City NORTH CANTON Zip Code +4 44726

Permit No. 8009 Section/Lot No. _____
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well _____


N ☐ X _____ ft. or m
S ☐ Y _____ ft. or m

Elevation of Well _____ ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source _____

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other _____

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: _____ Long: _____

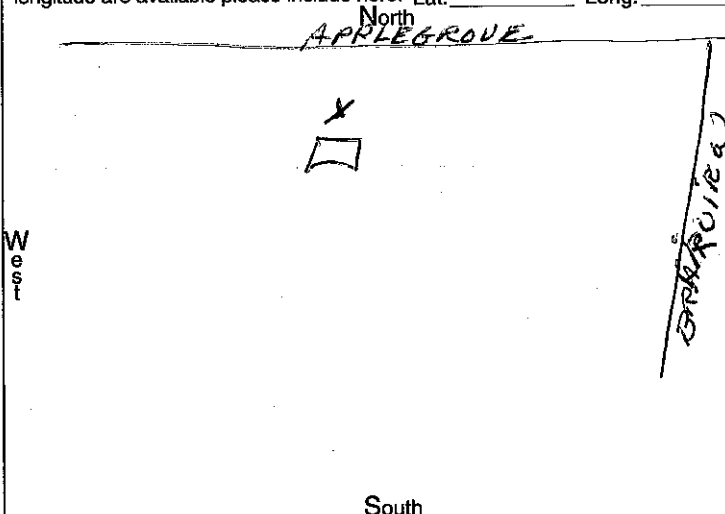

WELL TEST*

Pre-Pumping Static Level 50 ft. Date 10-30-98

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other _____

☐ Air ☒ Bailing ☒ Pumping* ☐ Other _____

Test Rate 10 gpm Duration of Test 3 hrs.

Feet of Drawdown 15 ft. Sustainable Yield 30 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality CLEAR

PUMP/PITLESS

Type of pump SUBMERSIBLE Capacity 7 gpm

Pump set at 253 ft. Pitless Type Williams

Pump installed by McGill Well Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm McGill Well Drilling

Address 801 39th St

City, State, Zip CANTON OHIO 44706

Signed Joe McGill Date 10-30-98

ODH Registration Number 152

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other _____

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter _____ inches Depth _____ ft.
Casing Diameter 7 in. Length 101 ft. Thickness 18 in.

2 ☐ Borehole Diameter 6 1/2 inches Depth 236 ft.
Casing Diameter 5 in. Length 228 ft. Thickness 14 in.

Casing Height Above Ground 24 ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other _____
2 ☒ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other _____

Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other _____
2 ☒ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other _____

SCREEN

Diameter NONE Slot Size _____ Screen Length _____ ft.

Type _____ Material _____

Set Between _____ ft. and _____ ft.

GRAVEL PACK (Filter Pack)

Material/Size NONE Volume/Weight Used _____

Method of Installation _____

Depth: Placed FROM _____ ft. TO _____ ft.

GROUT

Material BENTONITE Volume/Weight Used 400 #

Method of Installation SLURRY

Depth: Placed FROM 228 ft. TO 10 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED. Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.		From	To
SAND & Gravel		0	98
SHALE		98	103
SANDSTONE		103	172
SHALE		172	225
SANDSTONE		225	228
SHALE		228	240
SANDSTONE WATER		240	292

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 10-30-98 Total Depth of Well 292 ft.