

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

879695

WELL LOCATION

County Highland Township Concord

Owner/Builder Allen Igo
(Circle One or Both) First Last

Address of Well Location 3091 Concord Rd
Number Street Name

City Hillsboro Zip Code +4 45133
Permit No. 345852 Section/Lot No. South
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Single Family


N ☐ X ☒ ft. or m
S ☐ Y ☒ ft. or m

Elevation of Well ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☒ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

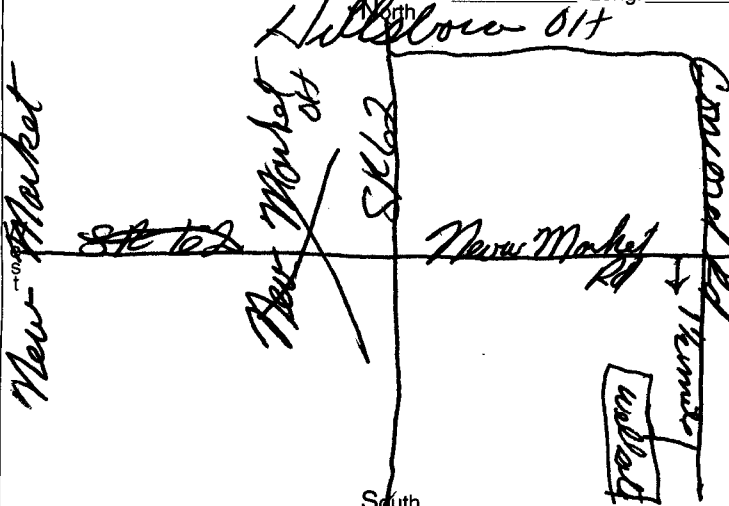

WELL TEST*

Pre-Pumping Static Level 10 ft. Date 6-

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 8 gpm Duration of Test 28 hrs.

Feet of Drawdown ft. Sustainable Yield 28 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Clear

PUMP/PITLESS

Type of pump Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Guy Hayslip & Son

Address 2213 SW 133 N

City, State, Zip Blanchester

Signed Dick Hayslip Date

ODH Registration Number

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 5 5/8 inches Depth 130 ft.

Casing Diameter 5 5/8 in. Length 34-1 ft. Thickness 188 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 16"

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material Benseal Volume/Weight Used 25 ft

Method of Installation put around casing

Depth: Placed FROM 20 ft. TO ground line ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown clay hard	0	15
lite gray clay & gravel mixed	15	25
some water		
Hard brown limestone	25	32
Real hard lite gray limestone	32	80
hard dark brown limestone	80	92
lite gray limestone & shale rock	92	130

Water in limestone

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 6-23-03 Total Depth of Well 130 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy