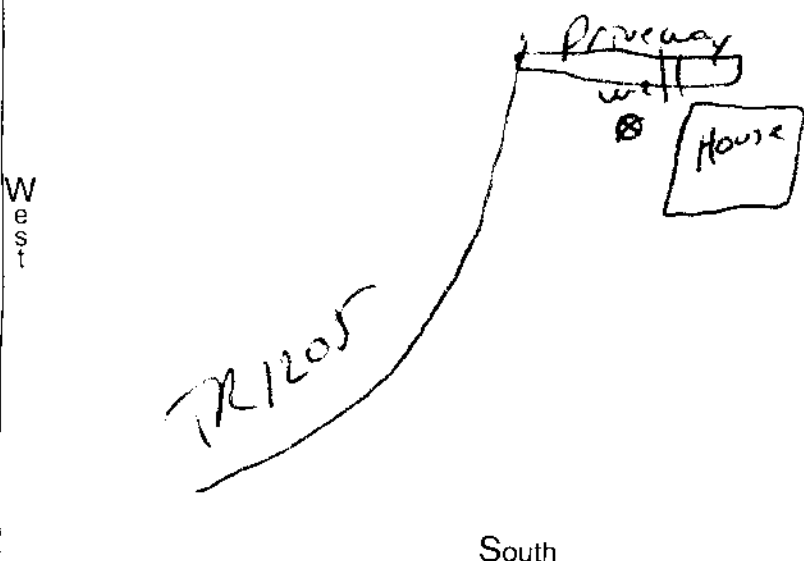


WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

909666

WELL LOCATIONCounty Cos. Horton Township KeeneOwner/Builder Michael Dunkley
(Circle One or Both) First LastAddress of Well Location 26840 TR 1205
Number Street NameCity Cos. Horton Zip Code +4 43812Permit No. 2005-117 Section/Lot No.
(Circle One or Both)Location of Well in State Plane
coordinates, if available:N ☐ X +/- ft. or mS ☐ Y +/- ft. or mElevation of Well +/- ft. or mDatum Plain: ☐ NAD27 ☐ NAD83 Elevation Source Source of Coordinates: ☐ GPS ☐ Survey ☐ Other Sketch a map showing distance well lies from numbered state highways, street
intersections, county roads, buildings or other notable landmarks. If latitude and
longitude are available please include here: Lat: Long:
North**WELL TEST***Pre-Pumping Static Level 90 ft. Date 3-1-06Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other ☐ Air ☒ Bailing ☐ Pumping* ☐ Other Test Rate 8 gpm Duration of Test 1 hrs.Feet of Drawdown 130 ft. Sustainable Yield 8 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☒ Yes ☐ NoQuality Good**PUMP/PITLESS**Type of pump Sumable Capacity 8 gpmPump set at 135 ft. Pitless Type PitlessPump installed by Vince Moran

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Moran's Water Well ServiceAddress 20677 CR 3City, State, Zip Warsaw, OhioSigned Vince MoranDate 4-10-06ODH Registration Number 002487**CONSTRUCTION DETAILS**☐ Rotary ☒ Cable ☐ Augered ☒ Driven ☐ Other **BOREHOLE/CASING** (measured from ground surface)1 ☐ Borehole Diameter 8" inches Depth 44' ft.Casing Diameter 5" in. Length 44' ft. Thickness .88 in.2 ☐ Borehole Diameter inches Depth ft.Casing Diameter in. Length ft. Thickness in.Casing Height Above Ground 18" ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐2 ☐ 2 ☐ 2 ☐ 2 ☐ Other Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐2 ☐ 2 ☐ 2 ☐ 2 ☐ Other **SCREEN**Diameter Slot Size Screen Length ft.Type Material Set Between ft. and ft.**GRAVEL PACK** (Filter Pack)Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO 94' ft.**GROUT**Material Pes. seal Volume/Weight Used 400 LBS.Method of Installation Grav. pourDepth: Placed FROM ft. TO 44' ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

From

To

SHALE & Loam	0	4
Light Clay	4	10
Lime Stone	10	23
CLAY	23	45
Lime Stone	45	60
CLAY	60	70
SHALE	70	86
SHALE	86	95
CLAY	95	105
CLAY	105	140

water
Enc. at 94'

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 3-1-06 Total Depth of Well 140 ft.Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy