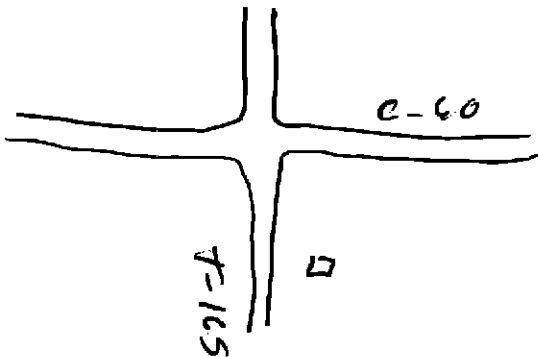


WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

912501

WELL LOCATIONCounty Paulding Township WashingtonOwner/Builder Cooper Farms White Oaks
(Circle One or Both) First LastAddress of Well Location RR1 T-165
Number Street NameCity Grove Hill Zip Code +4 45849Permit No. 00-034 Section/Lot No. 17
(Circle One or Both)Location of Well in State Plane coordinates, if available: Use of Well Hay Barn on Fall
N ☐ X +/- ft. or m. And
S ☐ Y +/- ft. or m.Elevation of Well +/- ft. or m.Datum Plain: ☒ NAD27 ☐ NAD83 Elevation Source Source of Coordinates: ☒ GPS ☐ Survey ☐ Other Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat. 41°02.5'N Long. 84°36.2'W
North

South

WELL TEST*Pre-Pumping Static Level 22 ft. Date 6-23-00Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other ☒ Air ☐ Bailing ☐ Pumping* ☐ Other Test Rate 70 gpm Duration of Test 1 hrs.Feet of Drawdown 8-25 Sustainable Yield 180+ gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ NoQuality clear Sulphur odor **PUMP/PITLESS**Type of pump Coolds Capacity 80 gpmPump set at 110 ft. Pitless Type 0. g/lensPump installed by Hyman Well Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Hyman Well DrillingAddress Box 98City, State, Zip Cecil, Ohio 45821Signed Dan L Date 7-17-00ODH Registration Number 696**CONSTRUCTION DETAILS**☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other **BOREHOLE/CASING** (measured from ground surface)1 ☐ Borehole Diameter 9 1/2 inches Depth 39 ft.Casing Diameter 6 in. Length 39 ft. Thickness SDR21 in.2 ☐ Borehole Diameter inches Depth ft.Casing Diameter in. Length ft. Thickness in.Casing Height Above Ground 2' ft.Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other **SCREEN**Diameter Slot Size Screen Length ft.Type Material Set Between ft. and ft.**GRAVEL PACK** (Filler Pack)Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO ft.**GROUT**Material Ez Seal Volume/Weight Used 150 lbMethod of Installation PumpDepth: Placed FROM 39 ft. TO Surface ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
yellow clay	0	15
gray clay	15	28
Broken Rock	28	36
gray limestone	36	142

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 6-23-00 Total Depth of Well 142 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy