

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

920294

WELL LOCATION

County GEauga Township Newbury

Owner/Builder (Circle One or Both) REBECCA PELTON
First Last

Address of Well Location 14256 Bass Lake Rd.
Number Street Name

City Newbury Zip Code +4 44665

Permit No. Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well DOMESTIC


N ☐ X + ft. or m
S ☐ Y + ft. or m

Elevation of Well + ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☒ Other 22B1

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 41° Long: 81°

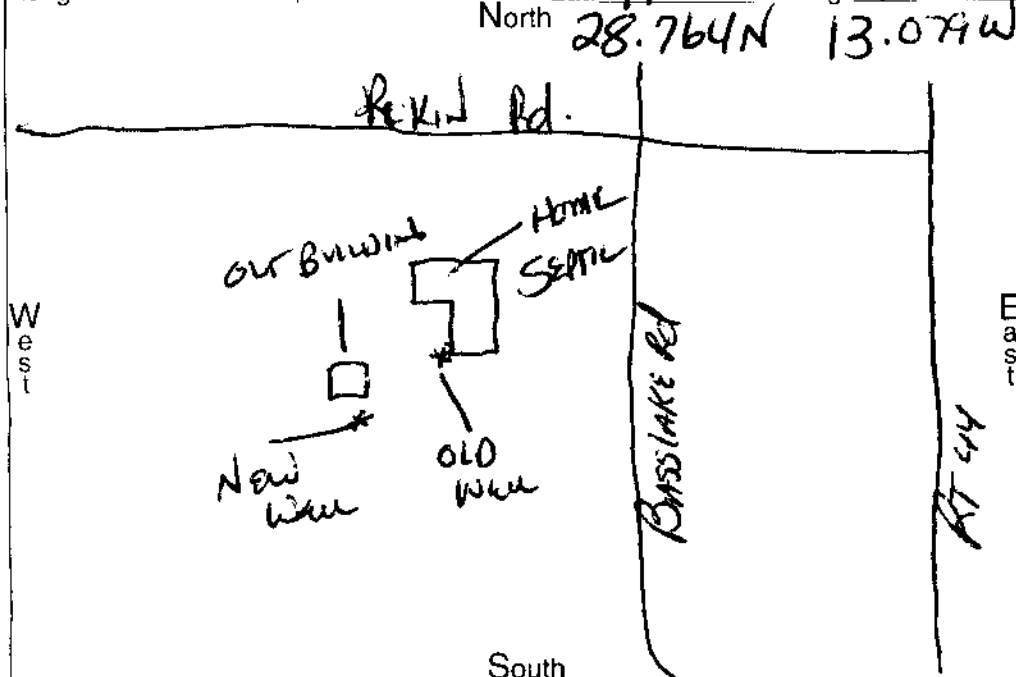

WELL TEST*

Pre-Pumping Static Level 61 ft. Date 10/31/05

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☒ Air ☐ Bailing ☐ Pumping* ☐ Other

Test Rate 25 gpm Duration of Test 1.5 hrs.

Feet of Drawdown 69 ft. Sustainable Yield 25 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality CLEAR

PUMP/PITLESS

Type of pump SUBMERSIBLE Capacity 8 gpm

Pump set at 100 ft. Pitless Type Pitless

Pump installed by GEAUGA DRUMS & SUPPLY CO INC

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm GEAUGA DRUMS & SUPPLY CO INC

Address 8999 FAIRMONT Rd

City, State, Zip NOVELTY, OHIO 44072

Signed Will F. Blumke Date 10/02/05

ODH Registration Number 276

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☒ Borehole Diameter 10 inches Depth 89.5 ft.

Casing Diameter 6 in. Length 91 ft. Thickness .316 in.

2 ☐ Borehole Diameter _____ inches Depth _____ ft.

Casing Diameter _____ in. Length _____ ft. Thickness _____ in.

Casing Height Above Ground 1.5 ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☒ Other CERTA LOCK

SCREEN

Diameter _____ Slot Size _____ Screen Length _____ ft.

Type _____ Material _____

Set Between _____ ft. and _____ ft.

GRAVEL PACK (Filter Pack)

Material/Size _____ Volume/Weight Used _____

Method of Installation _____

Depth: Placed FROM _____ ft. TO _____ ft.

GROUT

Material BENSER Volume/Weight Used 450 lbs

Method of Installation TREMIE TUBE

Depth: Placed FROM 89.5 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown clay	0	18
Gray clay	18	41
Gray clay, small seams of	41	63
Gray clay & gravel	63	81
Gray gravel & sand	81	82
CRUACE	82	120
SHARON CONG. S. STONE		

WATER AT 95-120

★ EXTRA GROUT USED
BECAUSE OF CRUACE IN S SONE

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 10/31/05 Total Depth of Well 120 ft.