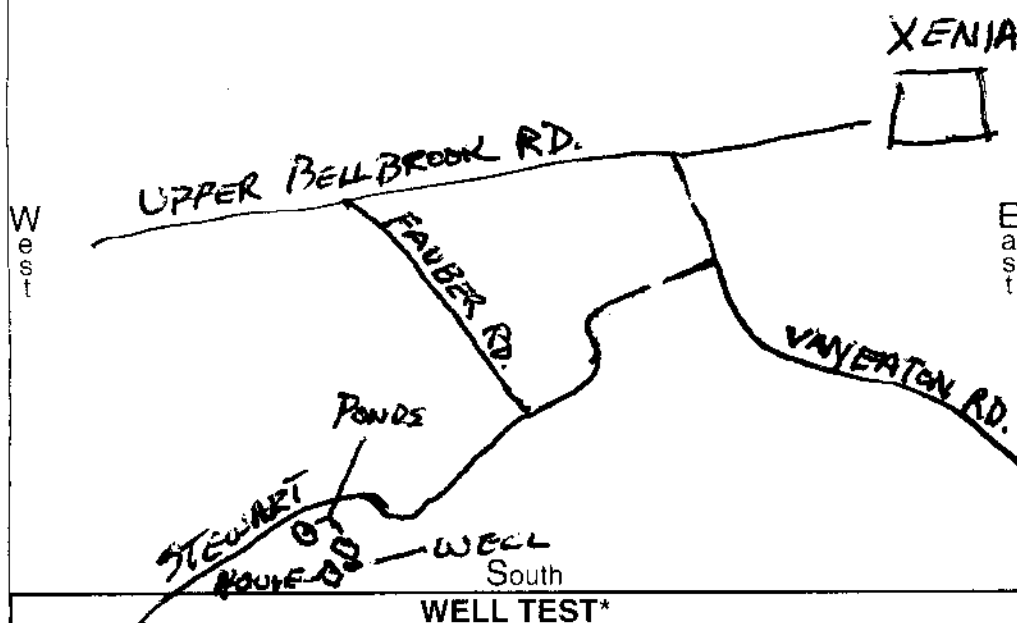


WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6740 Fax (614) 265-6767

982372

WELL LOCATIONCounty GREENE Township SUGARCREEKOwner/Builder WILLIE BUCKNER
(Circle One or Both) First LastAddress of Well Location 2123 STEWART RD.
Number Street NameCity XENIA Zip Code +4 45385
Permit No. 31245-46 Section/Lot No. ---
(Circle One or Both)Location of Well in State Plane coordinates, if available: Use of Well RESIDENTIALN X --- +/- --- ft. or mS Y --- +/- --- ft. or mElevation of Well 915' +/- --- ft. or mDatum Plain: ☐ NAD27 ☒ NAD83 Elevation Source TOPOSource of Coordinates: ☐ GPS ☐ Survey ☒ Other TOPOSketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 39.6585 Long 84.0127
North**WELL TEST***Pre-Pumping Static Level 17 ft. Date 2-5-05Measured from: ☐ Top of Casing ☒ Ground Level ☐ OtherAir ☒ Bailing ☐ Pumping* ☐ OtherTest Rate 10 gpm Duration of Test 1 hrs.Feet of Drawdown 5 ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ NoQuality CLOUDY**PUMP/PITLESS**Type of pump --- Capacity --- gpmPump set at --- ft. Pitless Type ---Pump installed by ---

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm BRUCE BREAKALL WELL DRILLINGAddress 3963 SHAWNEE TRAILCity, State, Zip JAMESTOWN, OHIO 45335Signed Bruce Breakall Date 2-5-05ODH Registration Number 002841**CONSTRUCTION DETAILS**Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other ☐**BOREHOLE/CASING** (measured from ground surface)1 ☒ Borehole Diameter 6 inches Depth 58 ft.Casing Diameter 6"OD in. Length 50 ft. Thickness .187 in.2 ☐ Borehole Diameter --- inches Depth --- ft.Casing Diameter --- in. Length --- ft. Thickness --- in.Casing Height Above Ground 15" ft.Type ☒ Steel ☐ Galv. ☐ PVC ☐ Other ---Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other ---2 ☐ 2 ☐ 2 ☐ 2 ☐ Other ---**SCREEN**Diameter 4" Slot Size .020 Screen Length 3 ft.Type V-SLOT WIRE WRAP Material STAINLESS STEELSet Between 50 ft. and 53 ft.**GRAVEL PACK** (Filter Pack)Material/Size --- Volume/Weight Used ---Method of Installation ---Depth: Placed FROM --- ft. TO --- ft.**GROUT**Material BANGLAR BENTONITE Volume/Weight Used 60#Method of Installation DRIVENDepth: Placed FROM 0 ft. TO 50 ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
BRN. CLAY & GRAVEL	0	14
GRAY CLAY & GRAVEL	14	41
SAND & GRAVEL (WATER)	41	54
GRAY CLAY & GRAVEL	54	58

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 2-5-05 Total Depth of Well 58 ft.