

WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources

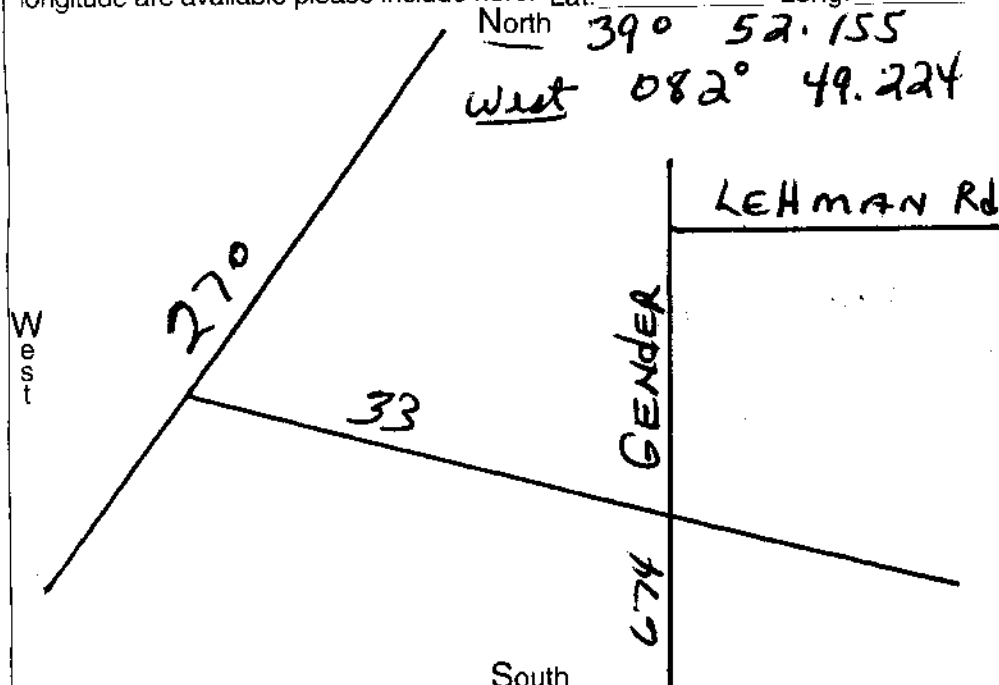
Division of Water, 2045 Morse Road

Columbus, Ohio 43229-6605 Voice (614) 265-6740 Fax (614) 265-6767

0995296

WELL LOCATIONCounty FRANKLIN Township MADISONOwner/Builder JOE PRAIL
(Circle One or Both) First LastAddress of Well Location 6720 LEHMAN RD
Number Street NameCity CANAL WINCHESTER OH. Zip Code +4 43110Permit No. 2005-77 Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available:

Use of Well Residential
N ☐ X 749 +/- ft. or m
S ☐ Y +/- ft. or mElevation of Well 749 +/- ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source GPSSource of Coordinates: ☒ GPS ☐ Survey ☐ OtherSketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 39° 52.155 Long: West 082° 49.224**WELL TEST***Pre-Pumping Static Level 17 ft. Date 6-27-05Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other☐ Air ☐ Bailing ☐ Pumping* ☐ OtherTest Rate 10 gpm Duration of Test 1 hrs.Feet of Drawdown 10 ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☐ NoQuality CLEAR**PUMP/PITLESS**Type of pump Submersible Capacity TO BE DETERMINED gpmPump set at 40 ft. Pitless Type ADAPTERPump installed by R.C. BARRY

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm STAGE INC D.B.A. R.C. BARRYAddress 6531 W. BROAD STCity, State, Zip GALLOWAY OH 43119Signed Darin Caton / MC Date 6-27-05ODH Registration Number 368**CONSTRUCTION DETAILS**☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other**BOREHOLE/CASING** (measured from ground surface)1 ☒ Borehole Diameter 7 7/8 inches Depth 52 ft.Casing Diameter 5 in. Length 52 ft. Thickness SDR21 in.2 ☐ Borehole Diameter _____ inches Depth _____ ft.

Casing Diameter _____ in. Length _____ ft. Thickness _____ in.

Casing Height Above Ground 15 ft.Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ OtherJoints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other**SCREEN**Diameter 5 Slot Size 50 Screen Length 2 ft.Type PVC Material PVCSet Between 50 ft. and 52 ft.**GRAVEL PACK** (Filter Pack)Material/Size #4 SAND Volume/Weight Used 400#

Method of Installation _____

Depth: Placed FROM 52 ft. TO 52 ft.**GROUT**Material BENSEAL + EZ mud Volume/Weight Used 50 gal / 100#Method of Installation TREMIE PIPEDepth: Placed FROM 52 ft. TO SURFACE ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

From To

RED CLAY	0	49
SAND + GRAVEL	49	52

Water encountered @ 52'

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 6-27-05 Total Depth of Well 52 ft.